


PERFORMANCE
MADE
SMARTER

Product manual

5437

2-wire HART 7 temperature transmitter

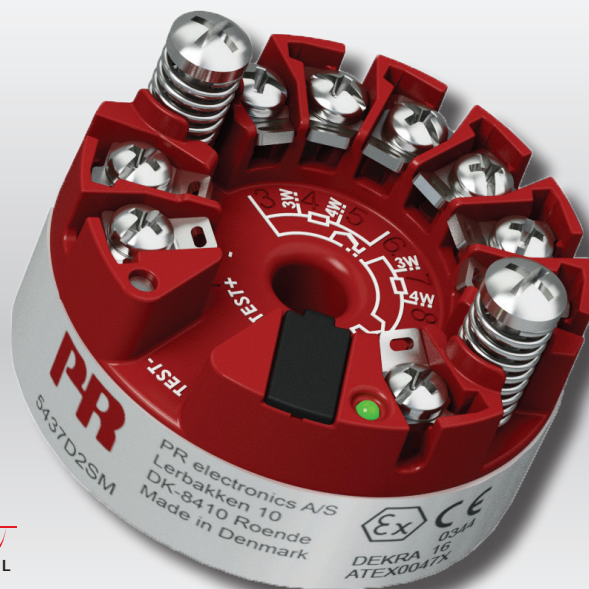

HART
COMMUNICATION PROTOCOL



TEMPERATURE | I.S. INTERFACES | COMMUNICATION INTERFACES | MULTIFUNCTIONAL | ISOLATION | DISPLAY

No. 5437V105-UK

Product version: 01.00.00-01.99.99


PR
electronics

6 Product Pillars

to meet your every need

Individually outstanding, unrivalled in combination

With our innovative, patented technologies, we make signal conditioning smarter and simpler. Our portfolio is composed of six product areas, where we offer a wide range of analog and digital devices covering over a thousand applications in industrial and factory automation. All our products comply with or surpass the highest industry standards, ensuring reliability in even the harshest of environments and have a 5-year warranty for greater peace of mind.



Temperature

Our range of temperature transmitters and sensors provides the highest level of signal integrity from the measurement point to your control system. You can convert industrial process temperature signals to analog, bus or digital communications using a highly reliable point-to-point solution with a fast response time, automatic self-calibration, sensor error detection, low drift, and top EMC performance in any environment.



I.S. Interface

We deliver the safest signals by validating our products against the toughest safety standards. Through our commitment to innovation, we have made pioneering achievements in developing I.S. interfaces with SIL 2 Full Assessment that are both efficient and cost-effective. Our comprehensive range of analog and digital intrinsically safe isolation barriers offers multifunctional inputs and outputs, making PR an easy-to-implement site standard. Our backplanes further simplify large installations and provide seamless integration to standard DCS systems.



Communication

We provide inexpensive, easy-to-use, future-ready communication interfaces that can access your PR installed base of products. All the interfaces are detachable, have a built-in display for readout of process values and diagnostics, and can be configured via push-buttons. Product specific functionality includes communication via Modbus and Bluetooth and remote access using our PR Process Supervisor (PPS) application, available for iOS and Android.



Multifunction

Our unique range of single devices covering multiple applications is easily deployable as your site standard. Having one variant that applies to a broad range of applications can reduce your installation time and training, and greatly simplify spare parts management at your facilities. Our devices are designed for long-term signal accuracy, low power consumption, immunity to electrical noise and simple programming.



Isolation

Our compact, fast, high-quality 6 mm isolators are based on microprocessor technology to provide exceptional performance and EMC-immunity for dedicated applications at a very low total cost of ownership. They can be stacked both vertically and horizontally with no air gap separation between units required.



Display

Our display range is characterized by its flexibility and stability. The devices meet nearly every demand for display readout of process signals, and have universal input and power supply capabilities. They provide a real-time measurement of your process value no matter the industry, and are engineered to provide a user-friendly and reliable relay of information, even in demanding environments.

2-wire HART 7 temperature transmitter 5437

Table of contents

| | |
|--|----|
| Application | 4 |
| Technical characteristics | 4 |
| Mounting / installation | 4 |
| Applications | 4 |
| Order | 5 |
| Accessories | 5 |
| Label examples | 5 |
| Electrical specifications | 6 |
| Mechanical specifications | 15 |
| LED function | 16 |
| Jumpers | 16 |
| Test pins | 17 |
| HART commands | 17 |
| Advanced functions | 18 |
| Dynamic variable mapping | 19 |
| Overview of device variables | 19 |
| Write protection by software | 20 |
| Write protection by jumper | 20 |
| Changing the HART protocol version | 20 |
| SIL functionality | 22 |
| Connections | 23 |
| Block diagram | 24 |
| Programming | 24 |
| Connection of transmitters in multidrop mode | 26 |
| ATEX Installation Drawing | 27 |
| IECEX Installation Drawing | 32 |
| CSA Installation Drawing | 37 |
| FM Installation Drawing | 40 |
| Instalação INMETRO | 45 |
| NEPSI Installation Drawing | 50 |
| Appendix A: Diagnostics overview | 52 |
| Document history | 55 |

2-wire HART 7 temperature transmitter 5437

- RTD, TC, potentiometer, linear resistance and bipolar mV input
- Single or true dual inputs with sensor redundancy and drift detection
- Wide ambient operating temperature of -50 to +85°C
- Total accuracy from 0.014%
- 2.5 kVAC galvanic isolation
- Full assessment to IEC61508 : 2010 for use in SIL 2/3 applications

Application

- Temperature measurement of a wide range of TC and RTD types.
- Conversion of wide span linear resistance and potentiometer inputs to 4...20 mA.
- Conversion of bipolar mV signals to 4...20 mA.
- Integration into asset management schemes.
- Critical applications requiring superior accuracy and/or sensor redundancy and drift detection.

Technical characteristics


- True dual input transmitter. High density 7-terminal design accepts the widest range of dual input combinations.
- Sensor redundancy - output automatically switches to secondary sensor in event of primary sensor failure, maintaining uptime.
- Sensor drift detection - alerts when sensor differential exceeds user-defined limits, for maintenance optimization.
- Dynamic variable mapping for process data in addition to the primary variable e.g. dual input features such as average, differential and min./max. tracking.
- Groundbreaking digital and analog signal accuracy over full input span and ambient conditions.
- Extensive sensor matching including Callendar Van Dusen and custom linearizations.
- Programmable input limits with runtime metering ensure maximum process traceability and sensor out of range protection.
- IEC 61508 : 2010 full assessment up to SIL 3 together with enhanced EMC Functional Safety testing to IEC 61236-3-1.
- Meets NAMUR NE21, NE43, NE44, NE89, NE95 and NE107 compliant diagnostics information.

Mounting / installation


- For DIN form B sensor head mounting.
- Configuration via standard HART communication interfaces or by PR 5909 Loop Link.
- The 5437A can be mounted in zone 2 and zone 22 / Class I, Division 1, Groups A, B, C, D.
- The 5437B can be mounted in zone 0, 1, 2 and zone 20, 21, 22 including M1.
- The 5437D can be mounted in zone 0, 1, 2 and zone 20, 21, 22 including M1 / Class I, Division 1, Groups A, B, C, D.

Applications

Dual input

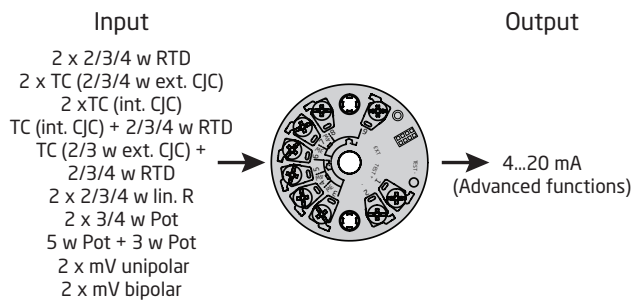

Single input

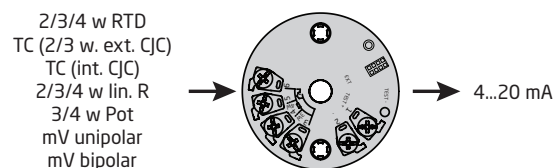

Order















| Type | Version | Inputs | SIL approval | Marine approval |
|------|--|--------------------------------|--------------|-----------------|
| 5437 | General purpose / Zone 2 / : A | Single input (4 terminals) : 1 | SIL : S | Yes : M |
| | DIV. 2 | Dual input (7 terminals) : 2 | No SIL : - | No : - |
| | Zone 0, 1, 2, 20, 21, 22, M1 : B (ATEX only) | | | |
| | Zone 0, 1, 2, 20, 21, 22, M1 / : D DIV. 1, DIV. 2 | | | |

Accessories












5909 = Loop Link USB interface and PReset Software
276USB = HART modem with USB connection

Label examples















5437A2SM

| | | | | | | |
|--|---|--|--|--|--|----------|
|  5437A2SM | PR electronics A/S Lerbakken 10 DK-8410 Roende Made in Denmark SN:123456789 |       |     |    | Ver:01.04.03 EU RO:MRA0000023 SIL:PREI 16031107 Install.:SN5437 Tag: | 5437S101 |
| | DEKRA 18 ATEX0135X DEKRA 16.0029X FM16CA0146X | | | | | |

5437B2SM

| | | | | | | |
|--|--|--|--|---|--|-----------|
|  5437B2SM | PR electronics A/S Lerbakken 10 DK-8410 Roende Made in Denmark SN:123456789 |       |     | U: 30V I: 120 mA P: see install C: 1nF L: 0 | Ver:01.04.03 EU RO:MRA0000023 SIL:PREI 16031107 Install.:SN5437 Tag: | 5437BS101 |
| | DEKRA 16 ATEX0047X 0344 II 1G Ex ia IIC T6...T4 Ga II 2(I) G Ex ib [ia Ga] IIC T6...T4 Gb II 1 D Ex ia IIC Da I M1 Ex ia I Ma See Installation drawing 5437QA01 | | | | | |

5437D2SM

| | | | | | | |
|--|--|--|--|--|--|-----------|
|  5437D2SM | PR electronics A/S Lerbakken 10 DK-8410 Roende Made in Denmark SN:123456789 |       |     |    | Ver:01.04.03 EU RO:MRA0000023 SIL:PREI 16031107 Install.:SN5437 Tag: | 5437BS101 |
| | DEKRA 16 ATEX0047X 0344 II 1G Ex ia IIC T6...T4 Ga II 2(I) G Ex ib [ia Ga] IIC T6...T4 Gb II 1 D Ex ia IIC Da I M1 Ex ia I Ma See Installation drawing 5437QA01 | | | | | |

Electrical specifications

Environmental conditions:

Ambient operating temperature range:

| | |
|---|----------------------|
| Standard. | -50°C to +85°C |
| SIL | -40°C to +80°C |
| Storage temperature | -50°C to +85°C |
| Calibration temperature. | 23...25°C |
| Humidity. | < 99% RH (non-cond.) |
| Protection degree, enclosure / terminals. | IP68 / IP00 |

Mechanical specifications:

| | |
|--------------------------------|--------------------------------------|
| Dimensions | Ø 44 x 20.2 mm |
| Center hole diameter | Ø 6.35 mm / ¼ in |
| Weight | 50 g |
| Max. wire size. | 1 x1.5 mm ² stranded wire |
| Screw terminal torque. | 0.4 Nm |
| Vibration. | IEC 60068-2-6 |
| 2...25 Hz. | ±1.6 mm |
| 25...100 Hz | ±4 g |

Common specifications:

| | |
|--|-------------------------------|
| Supply voltage, DC | |
| 5437A. | 7.5*...48** VDC |
| 5437B and 5437D. | 7.5*...30** VDC |
| 5437, EU-RO | 8.3...33.6 VDC ±10% |
| Additional min. supply voltage when using test terminals | 0.8 V |
| Max. internal power dissipation | ≤ 850 mW |
| Min. load resistance at > 37 V supply. | (Supply voltage – 37) / 23 mA |

* Note: Observe that the minimum Supply Voltage must be as measured at the terminals of the 5437, i.e. all external drops must be considered.

** Note: Make sure to protect the device from overvoltages by using a suitable power supply or by installing overvoltage protecting devices.

Isolation voltage, test/operation:

| | |
|---|---|
| 5437A. | 2.5 kVAC / 55 VAC |
| 5437B and 5437D. | 2.5 kVAC / 42 VAC |
| Polarity protection. | All inputs and outputs |
| Write protection | Jumper or software |
| Warm-up time. | < 5 min. |
| Start-up time | < 2.75 s |
| Programming | Loop Link & HART |
| Signal / noise ratio. | > 60 dB |
| Long-term stability, better than. | ±0.05% of span / year ±0.18% of span / 5 years |
| Response time | 70 ms |
| Programmable damping. | 0...60 s |
| Signal dynamics, input | 24 bit |
| Signal dynamics, output | 18 bit |
| Effect of supply voltage variation. | < 0.005% of span / VDC |

Input accuracies:

| Basic values | | |
|----------------------------|---|---|
| Input type | Basic accuracy | Temperature coefficient* |
| Pt10 | $\leq \pm 0.8^{\circ}\text{C}$ | $\leq \pm 0.020^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt20 | $\leq \pm 0.4^{\circ}\text{C}$ | $\leq \pm 0.010^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt50 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.004^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt100 | $\leq \pm 0.04^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt200 | $\leq \pm 0.08^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt500 | $T_{\text{max.}} \leq 180^{\circ}\text{C}: \leq \pm 0.08^{\circ}\text{C}$ $T_{\text{max.}} > 180^{\circ}\text{C}: \leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt1000 | $\leq \pm 0.08^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt2000 | $T_{\text{max.}} \leq 300^{\circ}\text{C}: \leq \pm 0.08^{\circ}\text{C}$ $T_{\text{max.}} > 300^{\circ}\text{C}: \leq \pm 0.40^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt10.000 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Pt x | The highest tolerance of the adjacent points | The highest coefficient of the adjacent points |
| Ni10 | $\leq \pm 1.6^{\circ}\text{C}$ | $\leq \pm 0.020^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni20 | $\leq \pm 0.8^{\circ}\text{C}$ | $\leq \pm 0.010^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni50 | $\leq \pm 0.32^{\circ}\text{C}$ | $\leq \pm 0.004^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni100 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni120 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni200 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni500 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni1000 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni2000 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni10000 | $\leq \pm 0.32^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Ni x | The highest tolerance of the adjacent points | The highest coefficient of the adjacent points |
| Cu5 | $\leq \pm 1.6^{\circ}\text{C}$ | $\leq \pm 0.040^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu10 | $\leq \pm 0.8^{\circ}\text{C}$ | $\leq \pm 0.020^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu20 | $\leq \pm 0.4^{\circ}\text{C}$ | $\leq \pm 0.010^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu50 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.004^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu100 | $\leq \pm 0.08^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu200 | $\leq \pm 0.08^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu500 | $\leq \pm 0.16^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu1000 | $\leq \pm 0.08^{\circ}\text{C}$ | $\leq \pm 0.002^{\circ}\text{C} / ^{\circ}\text{C}$ |
| Cu x | The highest tolerance of the adjacent points | The highest coefficient of the adjacent points |
| Lin. R: 0...400 Ω | $\leq \pm 40 \text{ m}\Omega$ | $\leq \pm 2 \text{ m}\Omega / ^{\circ}\text{C}$ |
| Lin. R: 0...100 k Ω | $\leq \pm 4 \Omega$ | $\leq \pm 0.2 \Omega / ^{\circ}\text{C}$ |
| Potentiometer: 0...100% | $< 0.05\%$ | $< \pm 0.005\%$ |

* Input temperature coefficients are the listed values or 0.002% of input span, whichever is greater.

| Basic values | | |
|--------------------------|---|---|
| Input type | Basic accuracy | Temperature coefficient* |
| mV: -20...100 mV | $\leq \pm 5 \mu\text{V}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.2 \mu\text{V} / ^\circ\text{C}$ |
| mV: -100...1700 mV | $\leq \pm 0.1 \text{ mV}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 36 \mu\text{V} / ^\circ\text{C}$ |
| mV: $\pm 800 \text{ mV}$ | $\leq \pm 0.1 \text{ mV}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 32 \mu\text{V} / ^\circ\text{C}$ |
| TC E | $\leq \pm 0.2^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TC J | $\leq \pm 0.25^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TJ K | $\leq \pm 0.25^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TC L | $\leq \pm 0.35^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TC N | $\leq \pm 0.4^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TC T | $\leq \pm 0.25^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TC U | $< 0^\circ\text{C}: \leq \pm 0.8^\circ\text{C}$ $\leq \pm 0.01\%$ of reading $\geq 0^\circ\text{C}: \leq \pm 0.4^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.025^\circ\text{C} / ^\circ\text{C}$ |
| TC Lr | $\leq \pm 0.2^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC R | $< 200^\circ\text{C}: \leq \pm 0.5^\circ\text{C}$ $\leq \pm 0.01\%$ of reading $\geq 200^\circ\text{C}: \leq \pm 1.0^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC S | $< 200^\circ\text{C}: \leq \pm 0.5^\circ\text{C}$ $\leq \pm 0.01\%$ of reading $\geq 200^\circ\text{C}: \leq \pm 1.0^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC W3 | $\leq \pm 0.6^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC W5 | $\leq \pm 0.4^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC type: B ¹ | $\leq \pm 1^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC type: B ² | $\leq \pm 3^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.1^\circ\text{C} / ^\circ\text{C}$ |
| TC type: B ³ | $\leq \pm 8^\circ\text{C}$ $\leq \pm 0.01\%$ of reading | $\leq \pm 0.8^\circ\text{C} / ^\circ\text{C}$ |
| TC type: B ⁴ | not specified | not specified |
| CJC (internal) | $< \pm 0.5^\circ\text{C}$ | Included in basic accuracy |
| CJC (external) | $\leq \pm 0.08^\circ\text{C}$ | $\leq \pm 0.002^\circ\text{C} / ^\circ\text{C}$ |

* Input temperature coefficients are the listed values or 0.002% of input span, whichever is greater.

TC B¹ accuracy specification range > 400°C
 TC B² accuracy specification range > 160°C < 400°C
 TC B³ accuracy specification range > 85°C < 160°C
 TC B⁴ accuracy specification range < 85°C

Output accuracies:

| Basic values | | |
|--------------------------|--|--|
| Output type | Basic accuracy | Temperature coefficient |
| Average measurement | Average of input 1 and 2 accuracy | Average of input 1 and 2 temperature coefficient |
| Differential measurement | Sum of input 1 and 2 accuracy | Sum of input 1 and 2 temperature coefficient |
| Analog output | $\leq \pm 1.6\mu\text{A}$ (0.01% of full output span) | $\leq \pm 0.48\mu\text{A} / \text{K}$ ($\leq \pm 0.003\%$ of full output span / K) |

Accuracy calculation examples:

Example: Pt100 sensor, configured from -200°C to +850°C:

Pt100_{Basic Accuracy} = 0.04°C

Output_{Analog Accuracy} = 0.0016 mA

$$\text{Total}_{\text{Accuracy (mA)}} = \frac{\text{Basic}_{\text{Accuracy}}}{\text{Configured_Span}_{\text{INPUT}}} \times 16.0 \text{ mA} + \text{Output}_{\text{Analog Accuracy}}$$

$$\text{Total}_{\text{Accuracy (mA)}} = \frac{0.04^{\circ}\text{C}}{850^{\circ}\text{C} - (-200^{\circ}\text{C})} \times 16.0 \text{ mA} + 0.0016 \text{ mA} = \underline{0.0022 \text{ mA}}$$

$$\text{Total}_{\text{Accuracy (\%)}} = \frac{\text{Total}_{\text{Accuracy (mA)}}}{16.0 \text{ mA}} \times 100\%$$

$$\text{Total}_{\text{Accuracy (\%)}} = \frac{0.0022 \text{ mA}}{16.0 \text{ mA}} \times 100\% = \underline{0.01381\%}$$

Example: Type K TC, internal CJC, measured reading of 400°C, span 0...400°C:

Type K TC_{Basic Accuracy} = 0.25°C

Output_{Analog Accuracy} = 0.0016 mA

$$\text{Total}_{\text{Accuracy (mA)}} = \frac{\text{Basic}_{\text{Accuracy}} + \text{Int. CJC} + (\text{Gain Deviation} \times \text{Measured Reading})}{\text{Configured_Span}_{\text{INPUT}}} \times 16.0 \text{ mA} + \text{Output}_{\text{Analog Accuracy}}$$

$$\text{Total}_{\text{Accuracy (mA)}} = \frac{0.25^{\circ}\text{C} + 0.5^{\circ}\text{C} (0.0001 \times 400)}{400^{\circ}\text{C}} \times 16.0 \text{ mA} + 0.0016 \text{ mA} = \underline{0.0332 \text{ mA}}$$

$$\text{Total}_{\text{Accuracy (\%)}} = \frac{\text{Total}_{\text{Accuracy (mA)}}}{16.0 \text{ mA}} \times 100\%$$

$$\text{Total}_{\text{Accuracy (\%)}} = \frac{0.0332 \text{ mA}}{16.0 \text{ mA}} \times 100\% = \underline{0.2075\%}$$

Example: Type K TC, external CJC Pt1000, measured reading of 400°C, span 0...400°C:

Type K TC_{Basic Accuracy} = 0.25°C

Output_{Analog Accuracy} = 0.0016 mA

$$\text{Total}_{\text{Accuracy (mA)}} = \frac{\text{Basic}_{\text{Accuracy}} + \text{Ext. CJC} + (\text{Gain Deviation} \times \text{Measured Reading})}{\text{Configured_Span}_{\text{INPUT}}} \times 16.0 \text{ mA} + \text{Output}_{\text{Analog Accuracy}}$$

$$\text{Total}_{\text{Accuracy (mA)}} = \frac{0.25^{\circ}\text{C} + 0.08^{\circ}\text{C} + (0.0001 \times 400)}{400^{\circ}\text{C}} \times 16.0 \text{ mA} + 0.0016 \text{ mA} = \underline{0.0164 \text{ mA}}$$

$$\text{Total}_{\text{Accuracy (\%)}} = \frac{\text{Total}_{\text{Accuracy (mA)}}}{16.0 \text{ mA}} \times 100\%$$

$$\text{Total}_{\text{Accuracy (\%)}} = \frac{0.0164 \text{ mA}}{16.0 \text{ mA}} \times 100\% = \underline{0.1025\%}$$

Example accuracy calculations are based on factory calibration ambient temperature, and do not take into account other potential sources of inaccuracy, e.g. power supply effect, ambient temperature fluctuation etc. which must also be considered.

| | |
|---|-----------------|
| EMC - immunity influence. | < ±0.1% of span |
| Extended EMC immunity: | |
| NAMUR NE 21, A criterion, burst | < ±1% of span |

Input specifications:

RTD input types:

| RTD type | Standard | Min. value | Max. value | α | Min. span |
|---------------|-----------------------------------|------------|------------|----------|-----------|
| Pt10...10.000 | IEC 60751 | -200°C | +850°C | 0.003851 | 10°C |
| | JIS C 1604-8 | -200°C | +649 °C | 0.003916 | 10°C |
| | GOST 6651-2009 | -200°C | +850°C | 0.003910 | 10°C |
| | Callendar Van Dusen | -200°C | +850°C | ----- | 10°C |
| Ni10...10.000 | DIN 43760-1987 | -60°C | +250°C | 0.006180 | 10°C |
| | GOST 6651-2009 / OIML R84:2003 | -60°C | +180°C | 0.006170 | 10°C |
| Cu5...1000 | Edison Copper Winding No. 15 | -200°C | +260°C | 0.004270 | 100°C |
| | GOST 6651-2009 / | -180°C | +200°C | 0.004280 | 100°C |
| | OIML R84:2003 | | | | |
| | GOST 6651-94 | -50°C | +200°C | 0.004260 | 100°C |

Connection type 2-, 3- and 4-wire

Cable resistance per wire (max.). 50 Ω

Sensor current < 0.15 mA

Effect of sensor cable resistance (3-/4-wire) < 0.002 Ω / Ω

Sensor cable, wire-wire capacitance Max. 30 nF (Pt1000 & Pt10000 IEC and JIS +
Ni1000 & Ni10000)
Max. 50 nF (others than above)

Sensor error detection, programmable None, Shorted, Broken, Shorted or Broken



NOTE: Regardless of the sensor error detection configuration, shorted sensor error detection will be disabled if the lower limit for the configured sensor type is lower than the constant detection limit for shorted sensor.

Detection limit for shorted sensor 15 Ω

Sensor error detection time (RTD element) \leq 70 ms

Sensor error detection time (for 3rd and 4th wire). \leq 2000 ms

TC input types:

| Type | Min. temperature | Max. temperature | Min. span | Standard |
|------|------------------|------------------|-----------|--------------|
| B | 0 (85)°C | +1820°C | 100°C | IEC 60584-1 |
| E | -200°C | +1000°C | 50°C | IEC 60584-1 |
| J | -100°C | +1200°C | 50°C | IEC 60584-1 |
| K | -180°C | +1372°C | 50°C | IEC 60584-1 |
| L | -200°C | +900°C | 50°C | DIN 43710 |
| Lr | -200°C | +800°C | 50°C | GOST 3044-84 |
| N | -180°C | +1300°C | 50°C | IEC 60584-1 |
| R | -50°C | +1760°C | 100°C | IEC 60584-1 |
| S | -50°C | +1760°C | 100°C | IEC 60584-1 |
| T | -200°C | +400°C | 50°C | IEC 60584-1 |
| U | -200°C | +600°C | 50°C | DIN 43710 |
| W3 | 0°C | +2300°C | 100°C | ASTM E988-96 |
| W5 | 0°C | +2300°C | 100°C | ASTM E988-96 |

Cold junction compensation (CJC):

Constant, internal or external via a Pt100 or Ni100 sensor

| | |
|---|--|
| Internal CJC temperature range | -50°C to +100°C |
| External CJC connection. | 2, 3 or 4-wire (4-wire only for dual input device) |
| External CJC cable resistance per wire (for 3- and 4-wire connections). . . . | 50 Ω |
| Effect of CJC cable resistance (for 3- and 4-wire connections) | < 0.002 Ω / Ω |
| External CJC sensor current. | < 0.15 mA |
| External CJC temperature range | -50°C to +135°C |
| CJC Sensor cable, wire-wire capacitance | Max. 50 nF |
| Maximum total cable resistance. | Max. 10 k Ω |
| Sensor cable, wire-wire capacitance | Max. 50 nF |
| Sensor error detection, programmable | None, Shorted, Broken, Shorted or broken |



Shorted sensor error detection only applies to CJC sensor.

Sensor error detection time (TC element) \leq 70 ms

Sensor error detection time, external CJC (for 3rd and 4th wire) \leq 2000 ms

Linear resistance input:

| | |
|---|---|
| Input range | 0 Ω ...100 k Ω |
| Min. span | 25 Ω |
| Connection type | 2-, 3- or 4-wire |
| Cable resistance per wire (max.). | 50 Ω |
| Sensor current | < 0.15 mA |
| Effect of sensor cable resistance (3- / 4-wire) | < 0.002 Ω / Ω |
| Sensor cable, wire-wire capacitance | Max. 30 nF (Lin. R > 400 Ω) Max. 50 nF (Lin. R \leq 400 Ω) |
| Sensor error detection, programmable | None, Broken |

Potentiometer input:

| | |
|---|---|
| Potentiometer | 10 Ω ...100 k Ω |
| Input range | 0...100 % |
| Min. span | 10% |
| Connection type | 3-, 4- or 5-wire (5-wire only for dual input device) |
| Cable resistance per wire (max.). | 50 Ω |
| Sensor current | < 0.15 mA |
| Effect of sensor cable resistance (4- / 5-wire) | < 0.002 Ω / Ω |
| Sensor cable, wire-wire capacitance | Max. 30 nF (Potentiometer > 400 Ω) Max. 50 nF (Potentiometer \leq 400 Ω) |
| Sensor error detection, programmable | None, Shorted, Broken, Shorted or Broken |



NOTE: Regardless of the sensor error detection configuration, shorted sensor error detection will be disabled if the configured potentiometer size is lower than the constant detection limit for shorted sensor.

Detection limit for shorted sensor 15 Ω

Sensor error detection time, wiper arm \leq 70 ms (no shorted sensor detection)

Sensor error detection time, element. \leq 2000 ms

Sensor error detection time (4th and 5th wire) \leq 2000 ms

mV input:


| | |
|--|--|
| Measurement range | -800...+800 mV (bipolar) -100 to 1700 mV |
| Min. span | 2.5 mV |
| Input resistance | 10 M Ω |
| Sensor cable, wire-wire capacitance | Max. 30 nF (input range: -100...1700 mV) Max. 50 nF (input range: -20...100 mV) |
| Sensor error detection, programmable | None, Broken |
| Sensor error detection time | \leq 70 ms |

Output specifications and HART:

| | |
|--|---|
| Normal range, programmable | 3.8...20.5 / 20.5...3.8 mA |
| Extended range (output limits), programmable | 3.5...23 / 23...3.5 mA |
| Updating time | 10 ms |
| Load (@ current output). | $\leq (V_{\text{supply}} - 7.5) / 0.023 [\Omega]$ |
| Load stability | < 0.01% of span / 100 Ω |

Of span = Of the presently selected range

Output load:

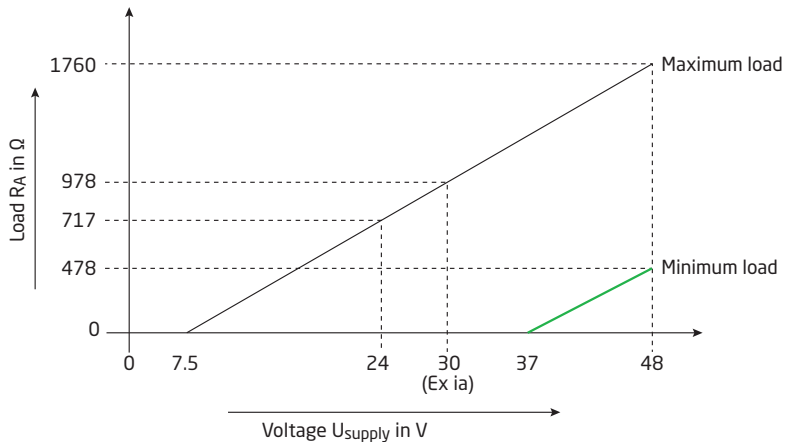

| | |
|--|-------------------|
| Sensor error indication, programmable | 3.5...23 mA |
| (shorted sensor error detection is ignored at TC and mV input) | |
| NAMUR NE43 Upscale | > 21 mA |
| NAMUR NE43 Downscale. | < 3.6 mA |
| HART protocol revisions. | HART 7 and HART 5 |

Programmable input/output limits:

| | |
|-----------------------------|------------------|
| Error current | Enable / disable |
| Set error current | 3.5 mA...23 mA |

Programmable input and current output limits are available to increase system safety and integrity.

Input:

When the input signal exceeds either of the programmable lower and upper limits, the device will output a user defined error current. Setting input limits ensures that any out of range measurements can be uniquely identified and flagged via the transmitter output, resulting in improved asset and material protection e.g. thermal runaway of a reaction process can be mitigated.


Example:

Pt100 input ranged 100°C to 400°C

Input limits set to Upper = +650°C, Lower = -150°C


Error current set to 3.5 mA

Output limits set to Upper = 20.5 mA, Lower = 3.8 mA

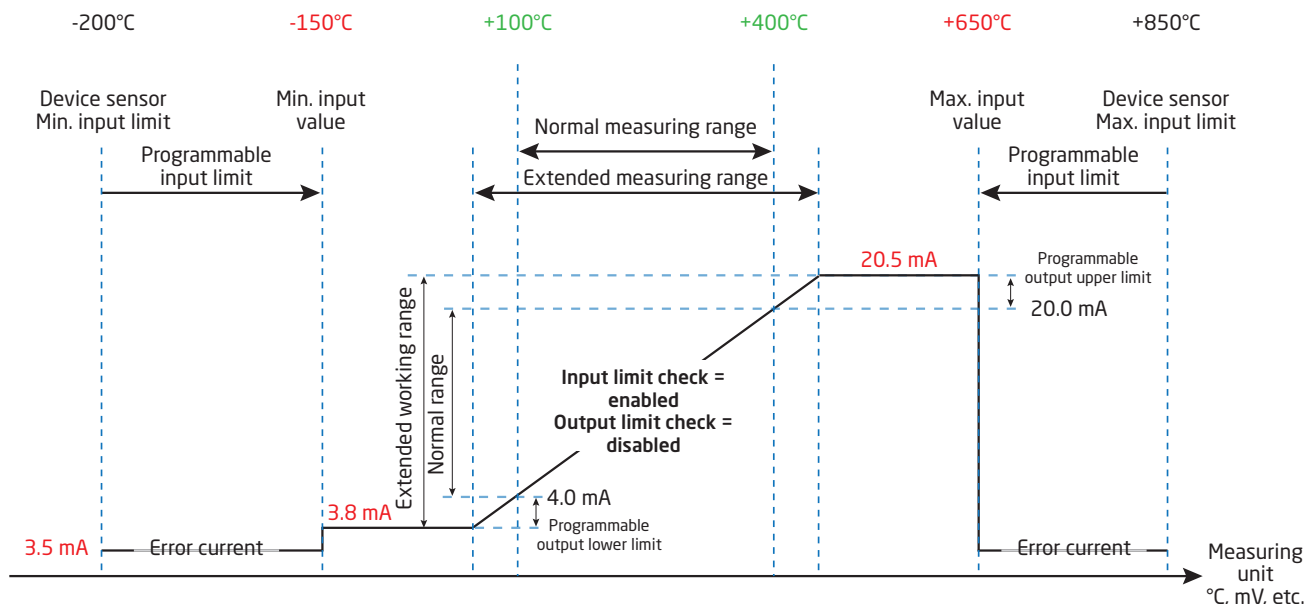

Output:

When the current output exceeds either of the programmable upper and lower limits, the device will output a user defined error current.

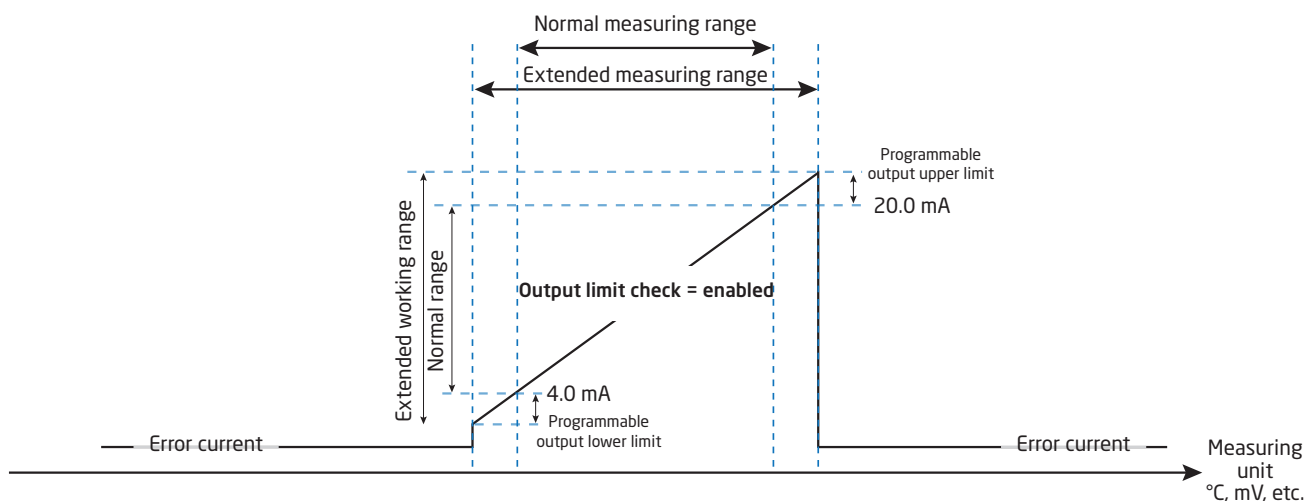

Observed authority requirements:

| | |
|------------------|----------------|
| EMC | 2014/30/EU |
| ATEX | 2014/34/EU |
| RoHS | 2011/65/EU |
| EAC | TR-CU 020/2011 |
| EAC Ex | TR-CU 012/2011 |

Approvals:

| | |
|--|------------|
| EU RO Mutual Recognition Type Approval | MRA0000023 |
|--|------------|

I.S. / Ex approvals:


| | |
|--------------------|---------------------------|
| 5437A: | |
| ATEX | DEKRA 18ATEX0135 X |
| 5437B: | |
| ATEX | DEKRA 16ATEX0047 X |
| 5437D: | |
| ATEX | DEKRA 16ATEX0047 X |
| 5437A and 5437D: | |
| IECEX | IECEX DEK. 16.0029X |
| c FM us | FM16CA0146X / FM16US0287X |
| c CSA us | 70066266 |
| INMETRO | DEKRA 16.0008X |
| NEPSI | GYJ18.1054X |
| EAC Ex | RU C-DK.ПБ.98.B.00192 |

Functional safety:

SIL2 Certified & Fully Assessed acc. to IEC 61508 : 2010
SFF> 93% - type B component
SIL3 Applicable through redundant structure (HFT=0; 1oo2)
FMEDA report - www.preelectronics.com


NAMUR:

| | |
|----------------------|-------------------|
| NE95 report. | Please contact us |
|----------------------|-------------------|

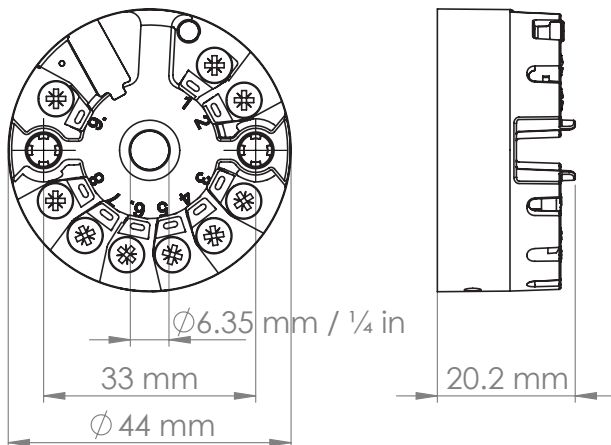Mechanical specifications

LED function

Onboard LED indicates faults according to NAMUR NE44 and NE107.


| Condition | Green / red LED |
|--|--|
| Device OK | Constant |
| No supply | OFF |
| Indication of faults independent of the device, e.g. wire break, sensor short circuit, violation of input or output limits | Flashing  |
| Device error | Constant |

For detailed device diagnostic behaviours and NE107 messaging, see Appendix A on page 52.


Jumpers

The device has two internal jumpers - one jumper to enable Write Protection and one jumper to select the output current at Safe State to go above 21 mA as specified in NAMUR NE43.

If the jumper is not inserted, the output current at Safe State will go lower than 3.6 mA as specified in NAMUR NE43.

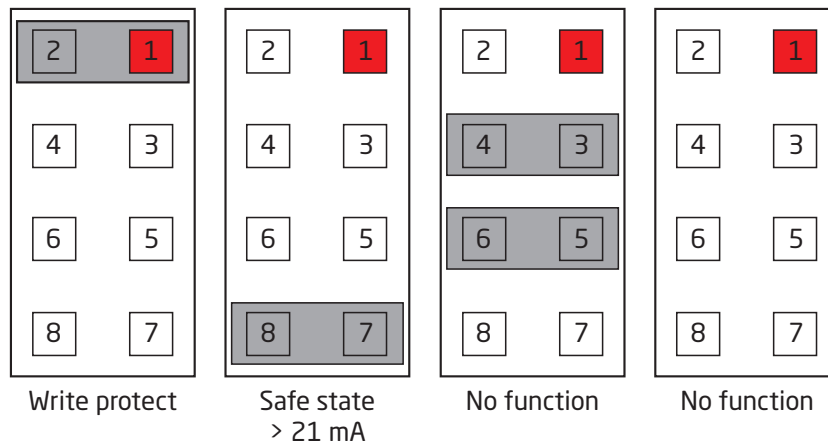


Jumper pin no. 1
is marked with red in the drawing.

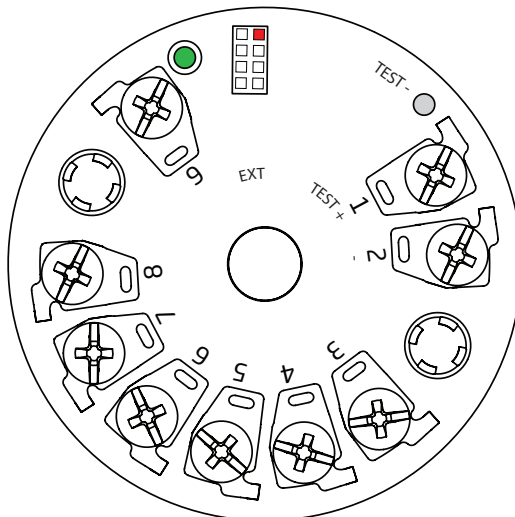

Test pins

The test pins allow measurement of loop current directly while maintaining loop integrity. Power must be connected to the transmitter when using the test pins.

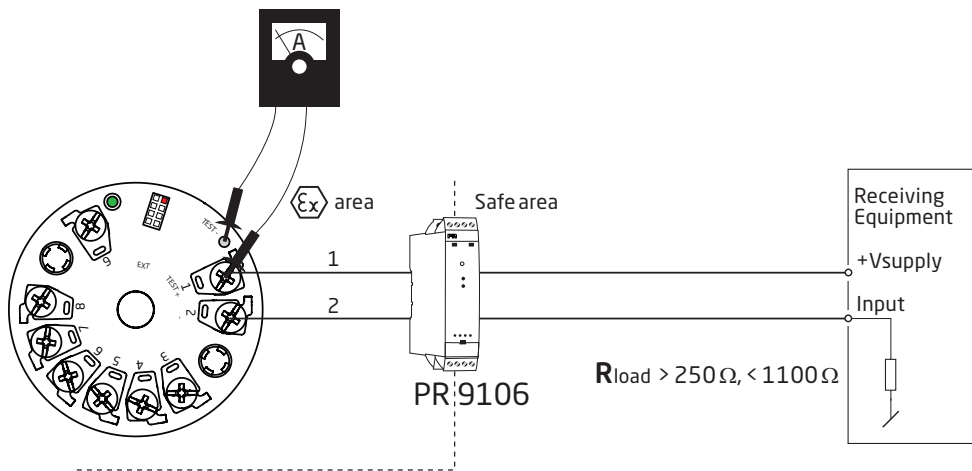

Warning!

For hazardous area installation, only certified test equipment may be used.

HART commands

For definitions and further information on HART commands for the 5437 please consult the 5437 HART Field Device Specification.

Advanced functions

| Function | Description |
|---|--|
| Differential | Analog output signal is proportional to the difference between input 1 and input 2 measurements. <i>Analog output = Input 1 - Input 2 or Input 2 - Input 1 or Input 2 - Input 1 </i> |
| Average measurement | Analog output signal is proportional to the average of input 1 and input 2 measurements. <i>Analog output = 0.5 * (Input 1 + Input 2)</i> |
| Max. | Analog output is proportional to the input with the highest value. <i>IF (Input 1 > Input 2) THEN AnalogOutput = Input 1 ELSE AnalogOutput = Input 2</i> |
| Min. | Analog output is proportional to the input with the lowest value. <i>IF (Input 1 < Input 2) THEN AnalogOutput = Input 1 ELSE AnalogOutput = Input 2</i> |
| Sensor drift | If the differential between input 1 and input 2 measured values exceed a predefined limit then a sensor drift error is indicated. <i>IF ABS (Input 1 - Input 2) > SensorDriftLimit THEN IndicateSensor-DriftError</i> |
| Redundancy (Hot Backup) | Analog output is proportional to input 1 as long as no error is detected and input is within user-defined limits. If sensor error on input 1 is detected or if sensor 1 value is outside user-defined limits, analog output then becomes proportional to input 2 and a warning indication is generated. <i>IF (NoSensorErrorOnInput1 AND Input1InsideLimits) THEN AnalogOutput = Input 1 ELSE IF (NoSensorErrorOnInput2 AND Input2InsideLimits) THEN AnalogOutput = Input 2</i> |
| Customized linearization - Polynomial Type | Supports polynomial linearization up to 5 segments, each with up to 4 th order polynomials. |
| Customized linearization - Callendar Van Dusen | Supports direct entry of CVD constants. |
| Customized linearization - Table linearization | Supports table linearization with up to 60 in/out values. |
| Customized linearization - 2 nd order spline linearization | Supports 2 nd order spline linearization with up to 40 output values. |
| Runtime meter - transmitter electronics | Recording of internal transmitter temperatures during operation, logging time spent in each of 9 fixed sub temperature ranges. <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px; text-align: center;">< -50°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">-50...-30°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">-30...-10°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">-10...+10°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">+10...+30°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">+30...+50°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">+50...+70°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">+70...+85°C</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">>85°C</div> </div> |
| Runtime meter - inputs | Recording of input measurement values during operation, logging time spent in each of 9 fixed sub input ranges. Subranges are defined individually for each input type. |
| Slave pointer - transmitter electronics | Recording of min./max. internal transmitter temperature for device's complete lifetime. |
| Slave pointer - inputs | Recording of min./max. values for input/s measurements is saved. Values are reset when measurement configuration is changed. |

Dynamic variable mapping


Four dynamic variables are supported, PV, SV, TV and QV.

Using HART commands, these may be assigned to any Device Variable (DV 0 - 15) in any combination.

The device variable mapped to PV controls the loop current.

| Device Variables | |
|------------------|---|
| DV0 | Input 1 (temperature, voltage, resistance...) |
| DV1 | Input 2 (temperature, voltage, resistance...) |
| DV2 | CJC 1, input 1 CJC temperature, only valid if input 1 is a TC input |
| DV3 | CJC 2, input 2 CJC temperature, only valid if input 2 is a TC input |
| DV4 | Average input 1 and input 2 |
| DV5 | Difference input 1 - input 2 |
| DV6 | Difference input 2 - input 1 |
| DV7 | Absolute difference (input 1 - input 2) |
| DV8 | Minimum (input 1, input 2) |
| DV9 | Maximum (input 1, input 2) |
| DV10 | Input 1 with input 2 as backup |
| DV11 | Input 2 with input 1 as backup |
| DV12 | Average input 1 and 2, with both as backup |
| DV13 | Minimum of input 1 and 2, with both as backup |
| DV14 | Maximum of input 1 and 2, with both as backup |
| DV15 | Electronics temperature |

Overview of device variables

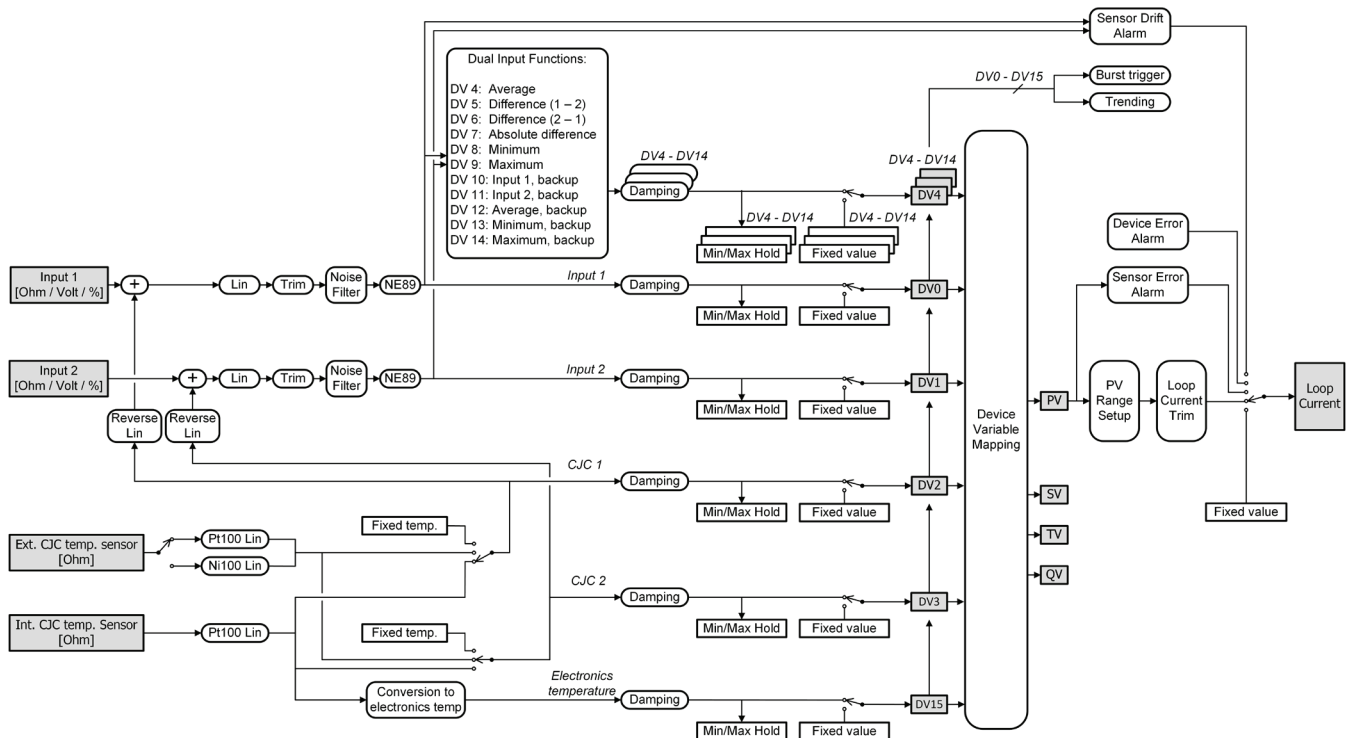

Write protection by software

The Default Active Password when the device leaves the factory is '*****'; this value can be changed by the user. The Universal Active Password "00002008" will always be accepted and this value cannot be changed. The Universal Active Password shall only be used if the Active Password has been lost and needs to be reset to a known value. When changing the password, use only Latin-1 characters that can be entered and displayed on any terminal.

When write protection is enabled, no "write" commands are accepted regardless of the "Write Protect" Hardware Jumper position.

Write protection by jumper

If a hardware jumper is set in position "Write Protect", no "write" commands are accepted regardless if disabled by software.

Changing the HART protocol version

It is possible to change the unit's HART protocol revision by using the PReset software and a PR 5909 Loop Link interface or a HART interface.

Other HART configuration tools like a handheld HART Terminal may also be used.

Procedure for using a HART hand-held terminal to change the 5437 from HART 7 to HART 5 and vice versa:

Change the 5437 from HART 7 to HART 5:

1. After entering the device menu (or after pressing home) the online menu is shown
2. Select **Device Setup** and press right arrow key (or simply press 7)
3. Select **Diagnostics/Service** and press right arrow key (or simply press 3)
4. Select **Write Protection** and press right arrow key (or simply press 6)
5. Select **Change to HART 5** and press right arrow key (or simply press 3)
6. When display says "Are you sure you want to change protocol to HART 5?" press OK
7. Enter the correct active password, default is "*****" (eight stars), and press OK
8. When the display says "Device is now in HART 5 mode" press OK and then Exit to go offline and rescan for new devices.
9. The device will now appear as being a 5437 (HART 5) device, select it to enter the online menu again

| |
|--|
| NOTE! After changing to HART 5, the configuration will be reset to the factory default. |
|--|

The quick key sequence from the online menu is: **7, 3, 6, 3, OK, OK, OK, Exit.**

To change the device back to HART 7, just follow the same procedure as above, except **Change to HART 7** must be selected in step 5.


When changing back to HART 7, the configuration remains unchanged.

Procedure for using the PReset software and 5909 Loop Link or HART communication interface to change the 5437 from HART 7 to HART 5 and vice versa:


Switching from HART 7 to HART 5

Select the 5437 product and click the "HART" tab.

Click "Device Password / Write Protection / Protocol..." and select "Change protocol to HART 5" in the pop-up window, then acknowledge by pressing OK.

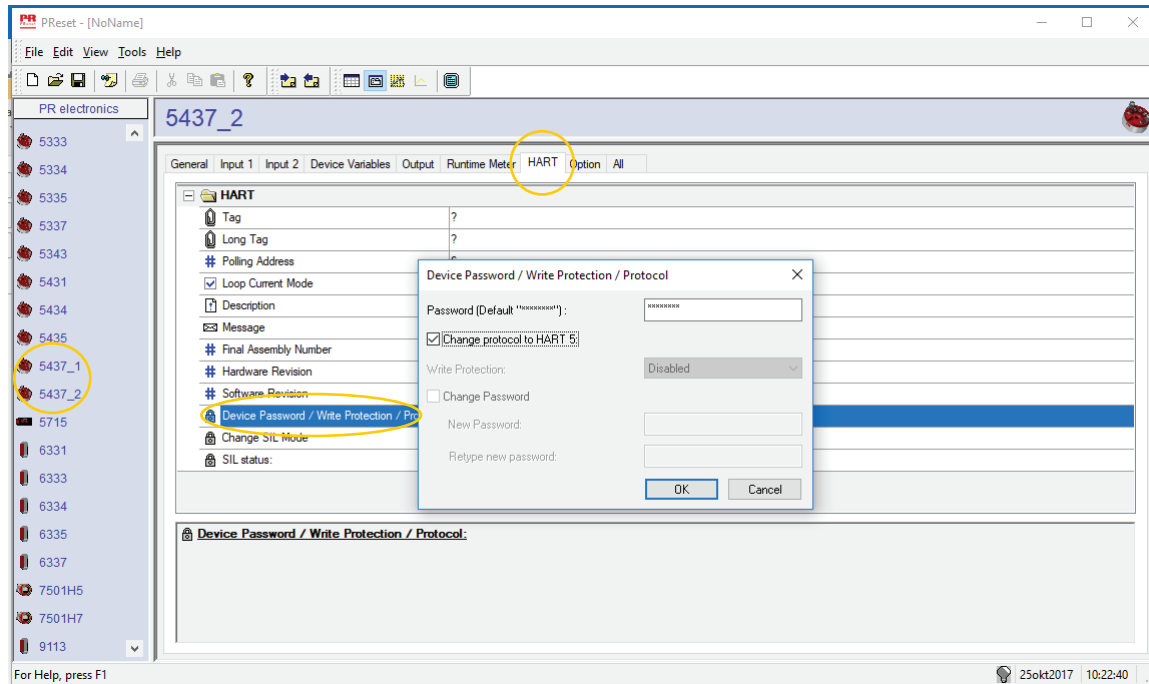

The following message will now appear:

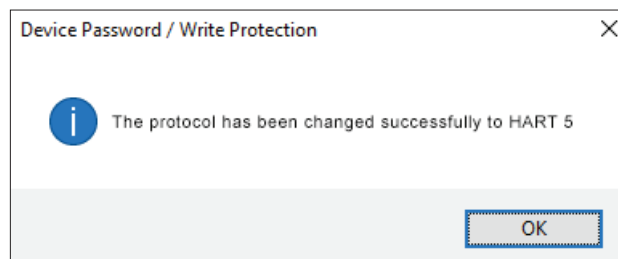


NOTE! After changing to HART 5, the configuration will be reset to the factory default.


Switching from HART 5 to HART 7

Select the 5437 product and click the "HART" tab.

Click "Device Password / Write Protection / Protocol..." and select "Change protocol to HART 7" in the pop-up window, then acknowledge by pressing OK.

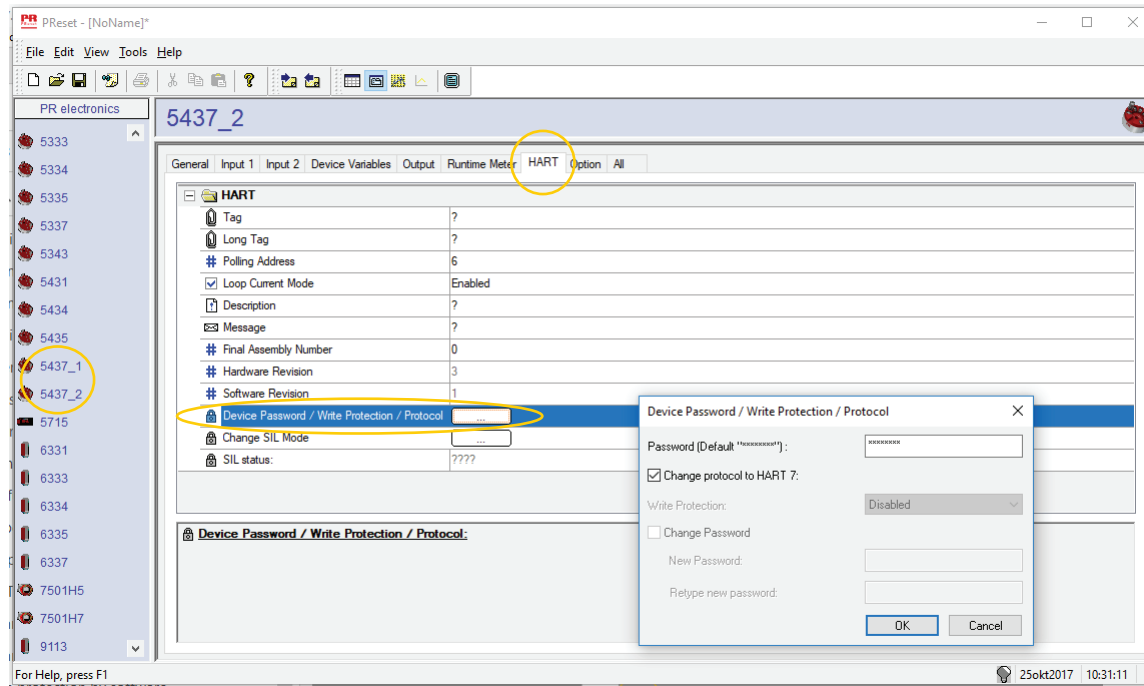

The following message will now appear:




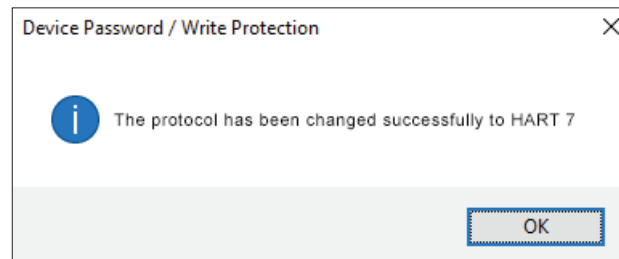


SIL functionality


For instructions and further information on how to enable SIL mode on the 5437 please consult the Safety Manual.

Connections

Single input

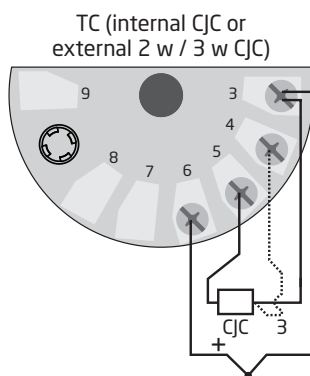


Output




Dual inputs


Input 1: 2 w / 3 w / 4 w RTD or lin. R
Input 2: 2 w / 3 w / 4 w RTD or lin. R




Input 1: TC (int. CJC or ext.
2 w / 3 w / 4 w CJC)
Input 2: TC (int. CJC or ext.
2 w / 3 w / 4 w CJC)




Input 1: mV
Input 2: mV




Input 1: TC (int. CJC or ext. 2 w / 3 w CJC)
Input 2: 2 w / 3 w / 4 w RTD




Input 1: 3 w / 4 w potentiometer
Input 2: 3 w / 4 w potentiometer

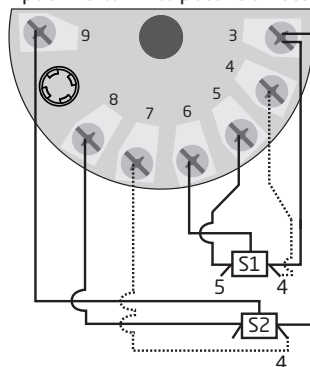

Input 1: 5 w potentiometer
Input 2: 3 w potentiometer

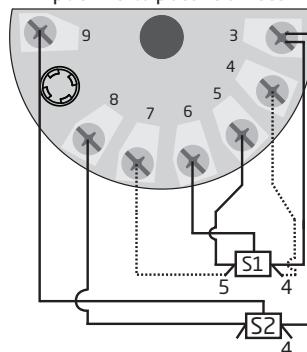

Block diagram

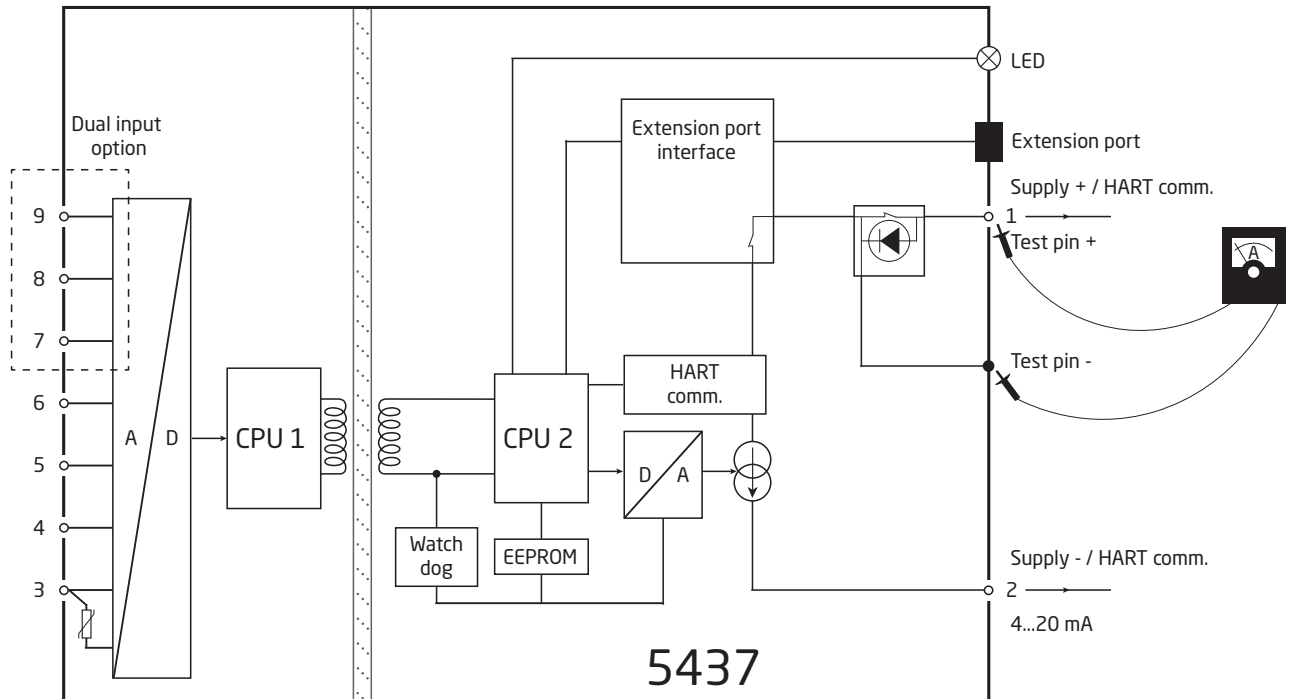

Programming


5437 can be configured in the following 4 ways:

1. With PR electronics A/S' communications interface Loop Link and PRreset PC configuration software.
2. With a HART modem and PRreset PC configuration software.
3. With a HART communicator with PR electronics A/S' DDL driver.
4. Via programming framework, e.g. DCS, PACTWare, etc.

1: Loop Link


For programming please refer to the drawing below and the help functions in PRreset.

Loop Link is not approved for communication with devices installed in hazardous (Ex) area.

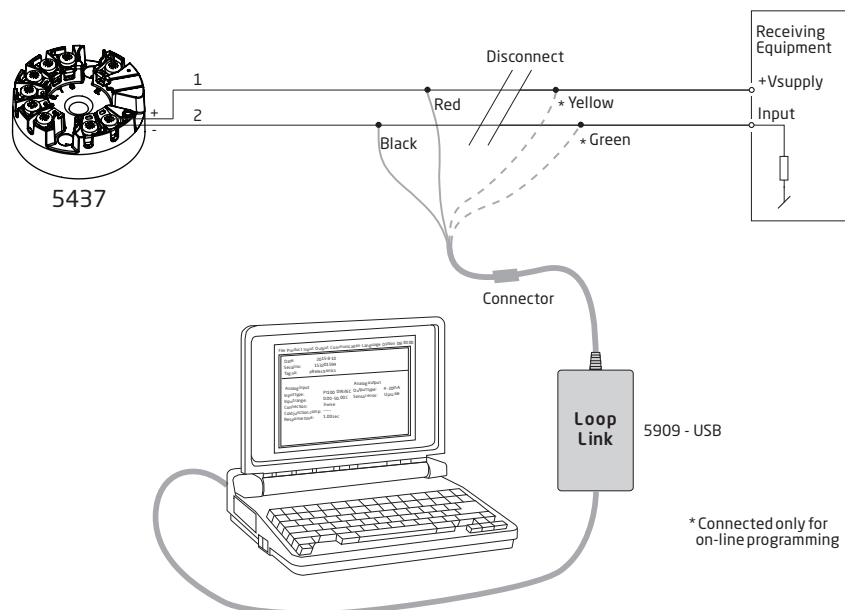


2: HART modem

For programming please refer to the drawing below and the help functions in PReset.

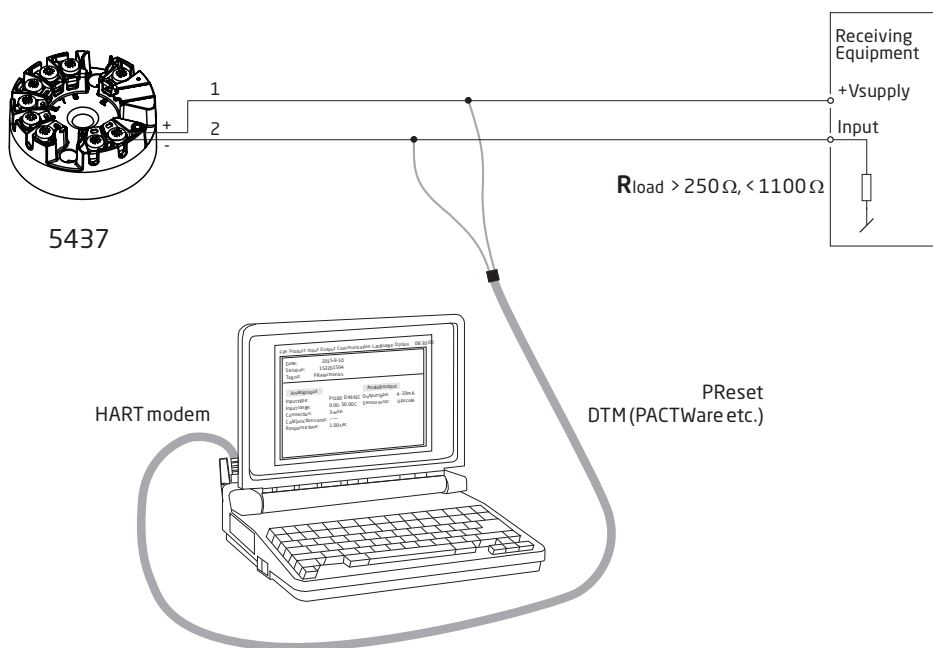

3: HART communicator

For programming please refer to the drawing below. To get access to productspecific commands, the HART communicator must be loaded with the PR electronics A/S DDL driver. This can be ordered either at the HART Communication Foundation or PR electronics A/S.

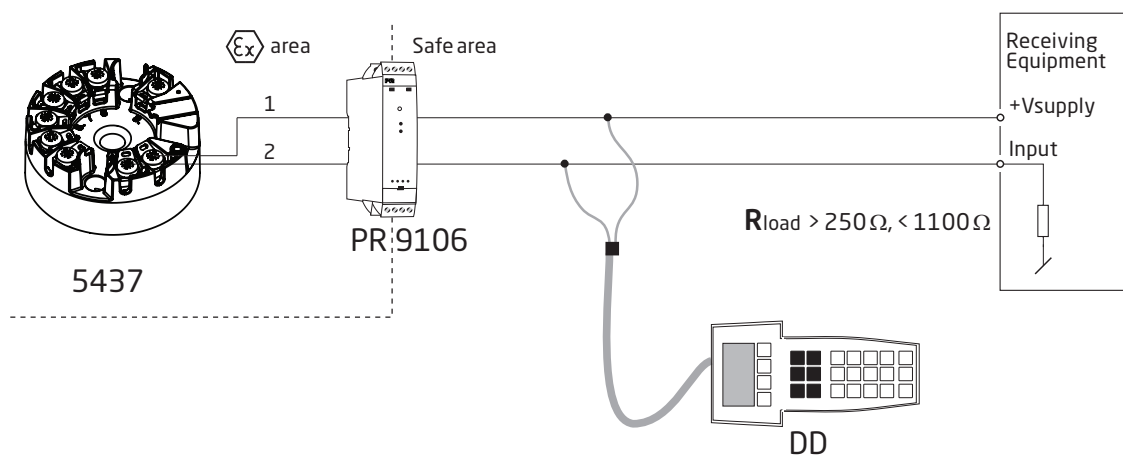


4: Programming framework

Support for both EDD and FDT/DTM technology, offering configuration and monitoring via relevant DCS/Asset Management Systems and supported management packages e.g. Pactware.



Connection of transmitters in multidrop mode

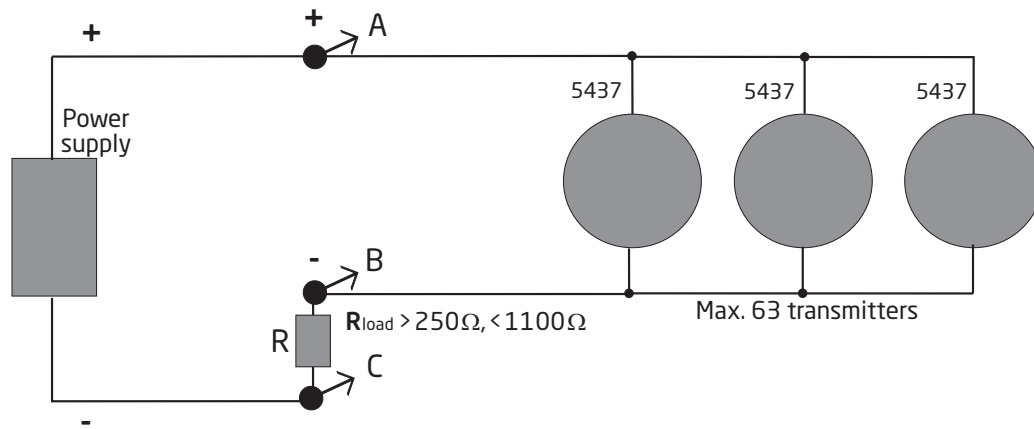

- The communication is either by means of a HART communicator or a HART modem.
- The HART communicator or a HART modem can be connected across AB or BC.
- The outputs of max. 63 transmitters can be connected in parallel for a digital HART communication on 2-wires.
- Before it is connected, each transmitter must be configured with a unique number from 1 to 63. If 2 transmitters are configured with the same number, both will be excluded. The transmitters must be programmed for multidrop mode (with a fixed output signal of 4 mA). Maximum current in the loop is therefore 252 mA.
- The PReset PC configuration software can configure the individual transmitter for multidrop mode and provide it with a unique polling address.

ATEX Installation drawing 5437QA01-V6R0

ATEX Certificate DEKRA 16ATEX 0047X
Standards: EN 60079-0:2012, A11:2013, EN60079-11:2012,
 EN60079-15:2010, EN60079-7:2015

Ex ia Installation

For safe installation of the 5431D.., 5434D.., 5435D.., 5437B.. and 5437D.. the following must be observed.

Marking




II 1 G Ex ia IIC T6...T4 Ga or
II 2(1) G Ex ib [ia Ga] IIC T6...T4 Gb
II 1 D Ex ia IIIC Da
I M1 Ex ia I Ma

Hazardous Area

Zone 0, 1, 2, 20, 21, 22 and M1

Unclassified Area

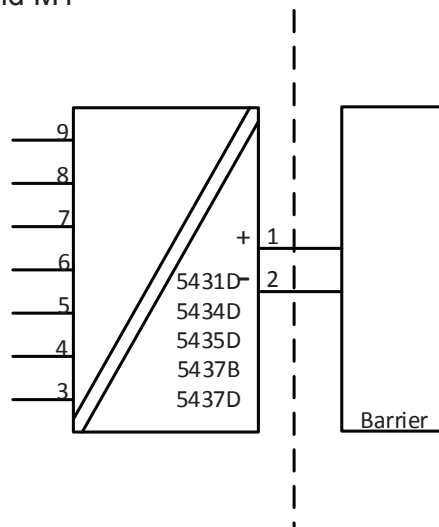


| | Terminal 3,4,5,6 and 3,7,8,9 | Terminal 3,4,5,6,7,8,9 |
|-----|---------------------------------|---------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 µF | 13.5 µF |

Ex ib Installation

Hazardous Area
Zone 0, 1, 2,
20, 21, 22 and M1

Hazardous Area
Zone 1

Unclassified Area

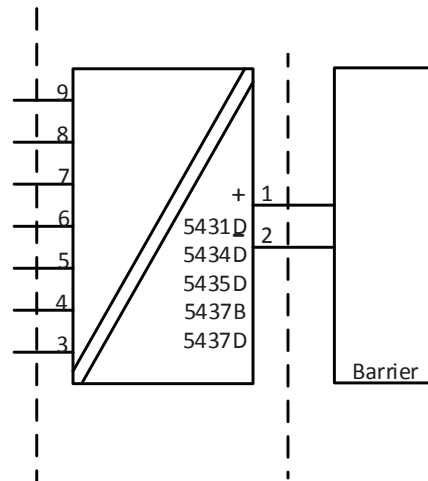

| | Terminal 3,4,5,6 and 3,7,8,9 | Terminal 3,4,5,6,7,8,9 |
|-----|---------------------------------|---------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 μ F | 13.5 μ F |

| Terminal 1,2 Ex ia and Ex ib installation Ui: 30 VDC; li: 120 mA; Li: 0 μ H; Ci: 1.0nF | Temperature Range |
|--|---|
| Pi: 900 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 65^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 50^{\circ}\text{C}$ |
| Pi: 750 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 70^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 55^{\circ}\text{C}$ |
| Pi: 610 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 75^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 60^{\circ}\text{C}$ |

General installation instructions

Year of manufacture can be taken from the first two digits in the serial number.

If the enclosure is made of non-metallic materials or is made of metal having a paint layer thicker than 0,2 mm (group IIC), or 2 mm (group IIB, IIA, I), or any thickness (group III), electrostatic charges shall be avoided.

For EPL Ga, if the enclosure is made of aluminum, it must be installed such, that ignition sources due to impact and friction sparks are excluded.

The distance between terminals, inclusive the wires bare part, shall be at least 3 mm separated from any earthed metal.

The test pins allow measurement of loop current directly while maintaining loop integrity. Power must be connected to the transmitter when using the test pins. For hazardous area installation, only certified test equipment may be used.

If the transmitter was applied in type of protection Ex nA or Ex ec, it may afterwards not be applied for intrinsic safety.

For installation in a potentially explosive gas atmosphere, the following instructions apply:

The transmitter shall be mounted in an enclosure form B according to DIN43729 or equivalent that is providing a degree of protection of at least IP20 according to EN60529.

The enclosure shall be suitable for the application and correctly installed.

For installation in a potentially explosive dust atmosphere, the following instructions apply:

The transmitter shall be mounted in a metal enclosure form B according to DIN43729 or equivalent, that is providing a degree of protection of at least IP5X according to EN60529. The enclosure shall be suitable for the application and correctly installed.

Cable entry devices and blanking elements shall fulfill the same requirements.

For EPL Da, the surface temperature "T" of the enclosure, for a dust layer with a maximum thickness of 5mm, is the ambient temperature +20 K.

For installation in mines the following instructions apply:

The transmitter shall be mounted in a metal enclosure that is providing a degree of protection of at least IP54 according to EN60529.

Aluminum enclosures are not allowed for mines.

The enclosure shall be suitable for the application and correctly installed.

Cable entry devices and blanking elements shall fulfill the same requirements.

Ex nA / Ex ec / Ex ic Installation

ATEX Certificate DEKRA 18ATEX0135X

For safe installation of the 5431A.., 5434A.., 5435A.. and 5437A.. the following must be observed.


Marking



II 3 G Ex nA IIC T6...T4 Gc
 II 3 G Ex ec IIC T6...T4 Gc
 II 3 G Ex ic IIC T6...T4 Gc
 II 3 D Ex ic IIIC Dc

Hazardous Area
 Zone 2 and 22

Unclassified Area

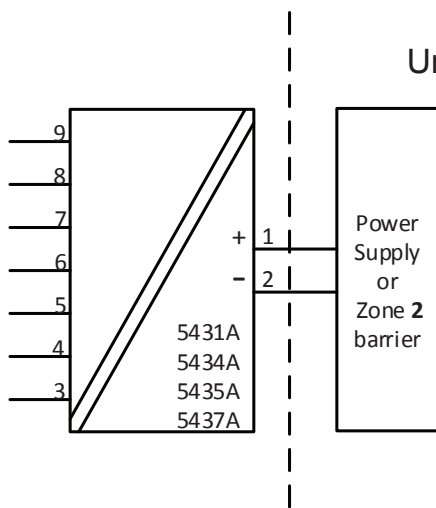

| Terminal 1,2 Ex nA & ec | Terminal 1,2 Ex ic | Terminal 1,2 Ex ic | Temperature Range |
|----------------------------|---|--|---|
| V _{max} = 37 VDC | U _i = 37 VDC L _i = 0 µH C _i = 1.0 nF | U _i = 48 VDC P _i = 851 mW L _i = 0 µH C _i = 1.0 nF | T4: -50 ≤ T _a ≤ 85°C T5: -50 ≤ T _a ≤ 70°C T6: -50 ≤ T _a ≤ 55°C |
| V _{max} = 30 VDC | U _i = 30 VDC L _i = 0 µH C _i = 1.0 nF | | T4: -50 ≤ T _a ≤ 85°C T5: -50 ≤ T _a ≤ 75°C T6: -50 ≤ T _a ≤ 60°C |

| Terminal 3,4,5,6,7,8,9 Ex nA & Ex ec | Terminal 3, 4, 5, 6 and 3, 7, 8, 9 Ex ic | Terminal 3,4,5,6,7,8,9 Ex ic |
|--|---|--|
| V _{max} = 7.2VDC | U _o : 7.2 VDC I _o : 7.3 mA P _o : 13.2 mW L _o : 667 mH C _o : 13.5µF | U _o : 7.2 VDC I _o : 12.9 mA P _o : 23.3 mW L _o : 200 mH C _o : 13.5µF |

General installation instructions

If the enclosure is made of non-metallic materials, or if it is made of metal having a paint layer thicker than 0,2 mm (group IIC), or 2 mm (group IIB, IIA, I), or any thickness (group III), electrostatic charges shall be avoided.

For an ambient temperature $\geq 60^{\circ}\text{C}$, heat resistant cables shall be used with a rating of at least 20 K above the ambient temperature.

The enclosure shall be suitable for the application and correctly installed

The distance between terminals, inclusive the wires bare part, shall be at least 3 mm separated from any earthed metal.

'TEST' connection, may only be applied when the area is safe, or if supply / output circuit and the applied current meter are intrinsically safe.

For installation in a potentially explosive gas atmosphere, the following instructions apply:

The transmitter must be installed in an enclosure providing a degree of protection of at least IP54 in accordance with EN60079-0.

In addition, the enclosure shall provide an internal pollution degree 2 or better as defined in EN 60664-1.

Cable entry devices and blanking elements shall fulfill the same requirements.

For installation in a potentially explosive dust atmosphere, the following instructions apply:

For EPL Dc, the surface temperature "T" of the enclosure, for a dust layer with a maximum thickness of 5 mm, is the ambient temperature +20 K.

If the transmitter is supplied with an intrinsically safe signal "ic" and interfaces an intrinsically safe signal "ic" (e.g. a passive device), the transmitter shall be mounted in a metal enclosure form B according to DIN 43729 or equivalent that provides a degree of protection of at least IP54 according to EN60079-0.

Cable entry devices and blanking elements shall fulfill the same requirements.

If the transmitter is supplied with a non-sparking signal "nA", or interfaces a non-sparking signal, the transmitter shall be mounted in an enclosure, providing a degree of protection of at least IP54 according to EN60079-0, and in conformance with type of protection Ex tD, or Ex t.

Cable entry devices and blanking elements shall fulfill the same requirements.

IECEX Installation drawing 5437QI01-V6R0

IECEX Certificate IECEx DEK 16.0029X

Standards: IEC60079-0:2011, IEC60079-11:2011,
IEC60079-15:2010, IEC60079-7:2015


For safe installation of the 5431D..,5434D.., 5435D.. and 5437D.. the following must be observed.

Marking Ex ia IIC T6...T4 Ga or
Ex ib [ia Ga] IIC T6...T4 Gb
Ex ia IIIC Da
Ex ia I Ma

Ex ia Installation

Hazardous Area
Zone 0, 1, 2, 20, 21, 22 and M1

Unclassified Area

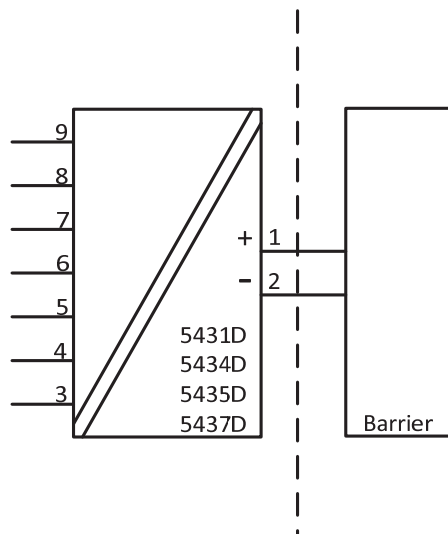


| | Terminal 3,4,5,6 and 3,7,8,9 | Terminal 3,4,5,6,7,8,9 |
|-----|---------------------------------|---------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 µF | 13.5 µF |

Ex ib Installation

Hazardous Area
Zone 0, 1, 2,
20, 21, 22 and M1

Hazardous Area
Zone 1

Unclassified Area

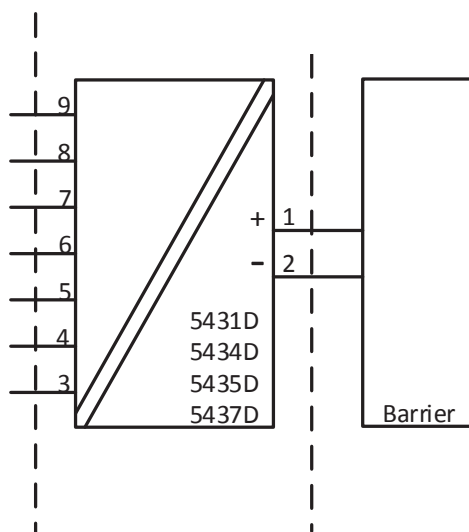

| | Terminal 3,4,5,6 and 3,7,8,9 | Terminal 3,4,5,6,7,8,9 |
|-----|---|-----------------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 µF | 13.5 µF |

| Terminal 1,2 Ex ia and Ex ib installation Ui: 30 VDC; li: 120 mA; Li: 0 µH; Ci: 1.0nF | Temperature Range |
|---|---|
| Pi: 900 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 65^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 50^{\circ}\text{C}$ |
| Pi: 750 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 70^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 55^{\circ}\text{C}$ |
| Pi: 610 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 75^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 60^{\circ}\text{C}$ |

General installation instructions

If the enclosure is made of non-metallic materials or is made of metal having a paint layer thicker than 0,2 mm (group IIC), or 2 mm (group IIB, IIA, I), or any thickness (group III), electrostatic charges shall be avoided.

For EPL Ga, if the enclosure is made of aluminum, it must be installed such, that ignition sources due to impact and friction sparks are excluded

The distance between terminals, inclusive the wires bare part, shall be at least 3 mm separated from any earthed metal.

The test pins allow measurement of loop current directly while maintaining loop integrity. Power must be connected to the transmitter when using the test pins. For hazardous area installation, only certified test equipment may be used.

If the transmitter was applied in type of protection Ex nA or Ex ec, it may afterwards not be applied for intrinsic safety.

For installation in a potentially explosive gas atmosphere, the following instructions apply:

The transmitter shall be mounted in an enclosure form B according to DIN43729 or equivalent that is providing a degree of protection of at least IP20 according to IEC60529.

The enclosure shall be suitable for the application and correctly installed.

For installation in a potentially explosive dust atmosphere, the following instructions apply:

The transmitter shall be mounted in a metal enclosure form B according to DIN43729 or equivalent that is providing a degree of protection of at least IP5X according to IEC60529. The enclosure shall be suitable for the application and correctly installed.

Cable entry devices and blanking elements shall fulfill the same requirements.

For EPL Da, The surface temperature of the enclosure, for a dust layer with a maximum thickness of 5mm, is the ambient temperature +20 K.

For installation in mines the following instructions apply:

The transmitter shall be mounted in a metal enclosure that is providing a degree of protection of at least IP54 according to IEC60529.

Aluminum enclosures are not allowed for mines.

The enclosure shall be suitable for the application and correctly installed.

Cable entry devices and blanking elements shall fulfill the same requirements.


Ex nA / Ex ec / Ex ic Installation

For safe installation of the 5431A.., 5434A.., 5435A.. and 5437A.. the following must be observed.

| | |
|---------|----------------------|
| Marking | Ex nA IIC T6...T4 Gc |
| | Ex ec IIC T6...T4 Gc |
| | Ex ic IIC T6...T4 Gc |
| | Ex ic IIIC Dc |

Hazardous Area
Zone 2 and 22

Unclassified Area

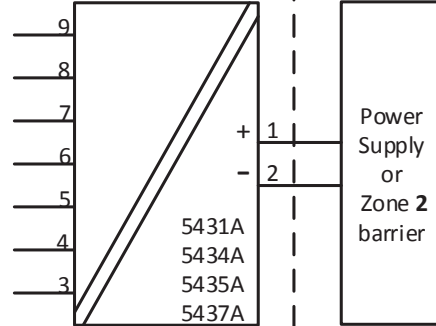

| Terminal 1,2 Ex nA & ec | Terminal 1,2 Ex ic | Terminal 1,2 Ex ic | Temperature Range |
|----------------------------|--|---|--|
| Vmax= 37 VDC | Ui = 37 VDC Li = 0 μ H Ci = 1.0 nF | Ui = 48 VDC Pi = 851 mW Li = 0 μ H Ci = 1.0 nF | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 70^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 55^{\circ}\text{C}$ |
| Vmax= 30 VDC | Ui = 30 VDC Li = 0 μ H Ci = 1.0 nF | | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 75^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 60^{\circ}\text{C}$ |

| Terminal 3,4,5,6,7,8,9 Ex nA & Ex ec | Terminal 3, 4, 5, 6 and 3, 7, 8, 9 Ex ic | Terminal 3,4,5,6,7,8,9 Ex ic |
|--|--|---|
| Vmax = 7.2VDC | Uo: 7.2 VDC Io: 7.3 mA Po: 13.2 mW Lo: 667 mH Co: 13.5 μ F | Uo: 7.2 VDC Io: 12.9 mA Po: 23.3 mW Lo: 200 mH Co: 13.5 μ F |

General installation instructions

If the enclosure is made of non-metallic materials, or if it is made of metal having a paint layer thicker than 0,2 mm (group IIC), or 2 mm (group IIB, IIA, I), or any thickness (group III), electrostatic charges shall be avoided.

For an ambient temperature $\geq 60^{\circ}\text{C}$, heat resistant cables shall be used with a rating of at least 20 K above the ambient temperature.

The enclosure shall be suitable for the application and correctly installed

The distance between terminals, inclusive the wires bare part, shall be at least 3 mm separated from any earthed metal.

'TEST' connection, may only be applied when the area is safe, or if supply / output circuit and the applied current meter are intrinsically safe.

For installation in a potentially explosive gas atmosphere, the following instructions apply:

The transmitter shall be installed in an enclosure providing a degree of protection of not less than IP54 in accordance with IEC 60079-0, which is suitable for the application and correctly installed e.g. in an enclosure that is in type of protection Ex n or Ex e. Additionally, the area inside the enclosure shall be pollution degree 2 or better as defined in IEC60664-1.

Cable entry devices and blanking elements shall fulfill the same requirements.

For installation in a potentially explosive dust atmosphere, the following instructions apply:

For EPL Dc, the surface temperature "T" of the enclosure, for a dust layer with a maximum thickness of 5 mm, is the ambient temperature +20 K.

If the transmitter is supplied with an intrinsically safe signal "ic" and interfaces an intrinsically safe signal "ic" (e.g. a passive device), the transmitter shall be mounted in a metal enclosure form B according to DIN 43729 or equivalent that provides a degree of protection of at least IP54 according to IEC60079-0.

Cable entry devices and blanking elements shall fulfill the same requirements.

If the transmitter is supplied with a non-sparking signal "nA", or interfaces a non-sparking signal, the transmitter shall be mounted in an enclosure, providing a degree of protection of at least IP54 according to IEC60079-0, and in conformance with type of protection Ex tD, or Ex t.

Cable entry devices and blanking elements shall fulfill the same requirements.

CSA Installation drawing 5437QC01-V5R0

CSA Certificate 70066266

Division1 / Ex ia, Intrinsic Safe Installation

For safe installation of the 5431D.,5434D., 5435D.. and 5437D.. the following must be Observed.


Marking

Class I Division 1, Group A,B,C,D
Class I, Zone 0: Ex/AEx ia IIC T6...T4
Ex/AEx ia IIC T6...T4
Ex/AEx ib [ia] IIC T6...T4

Hazardous Area

CL I, Div 1 GP ABCD or
CL I, Zone 0

Non Classified Area

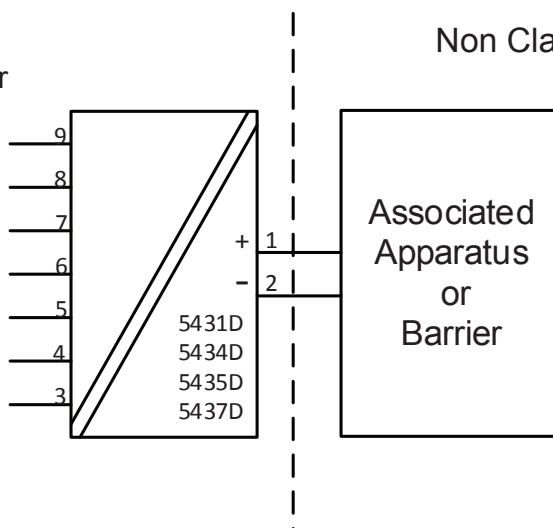

| | Terminal 3,4,5,6 and 3,7,8,9 | Terminal 3,4,5,6,7,8,9 |
|-----|---------------------------------|---------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 µF | 13.5 µF |

Um ≤ 250V
Voc or Uo ≤ Vmax or Ui
Isc or Io ≤ Imax or Ii
Po ≤ Pmax or Pi
Ca or Co ≥ Ci + Ccable
La or Lo ≥ Li + Lcable

| Terminal 1,2 Ex ia, Div1 Ui: 30 VDC; li: 120 mA Li:0 µH; Ci:1.0nF | Temperature Range |
|--|---|
| Pi: 900 mW | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 70°C T6: -50 ≤ Ta ≤ 55°C |
| Pi: 750 mW | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 75°C T6: -50 ≤ Ta ≤ 60°C |

IS Installation instructions

- Install in accordance with the US the National Electrical Code (NEC) or for Canada the Canadian Electrical Code (CEC).
- The transmitter must be installed in a suitable enclosure to meet installation codes stipulated in the Canadian Electrical Code (CEC) or for US the National Electrical Code (NEC).
- To establish Class II and Class III, Division 1 or IIIC ratings, the equipment shall be installed in an enclosure that is approved for use in Class II and Class III hazardous (classified) locations.
- If the enclosure is made of non-metallic materials or of painted metal, electrostatic charging shall be avoided.
- Use supply wires with a rating of at least 5 K above the ambient temperature.

WARNING: Substitution of components may impair intrinsic safety

AVERTISSEMENT: la substitution de composants peut nuire à la sécurité intrinsèque


Division 2 / Ex nA, Non Incendive Installation

For safe installation of the 5431A.., 5434A.., 5435A.. and 5437A.. the following must be observed.

Marking Class I, Division 2, Groups A, B, C, D
 Class I, Zone 2: Ex/AEx nA IIC T6...T4
 Ex nA IIC T6...T4
 Class I, Zone 2: Ex/AEx nA [ic] IIC T6...T4
 Ex nA [ic] IIC T6...T4

Hazardous Area
CL I, Div 2, GP ABCD
CL I, Zone 2 IIC

Unclassified Area

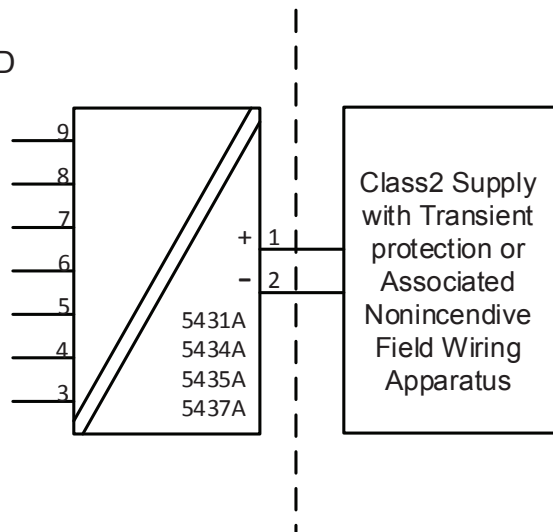

Terminal:
3,4,5,6,7,8,9
Vmax: 7.2 VDC

| Terminal 1,2 Ex nA | Temperature Range |
|-------------------------------------|--|
| Supply voltage: max 37 VDC | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 70^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 55^{\circ}\text{C}$ |
| Supply voltage: max 30 VDC | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 75^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 60^{\circ}\text{C}$ |

NI Installation instructions

- The transmitter must be installed in an enclosure providing a degree of protection of at least IP54 according to IEC60529 that is suitable for the application and is correctly installed. Cable entry devices and blanking elements shall fulfill the same requirements.
- If the enclosure is made of non-metallic materials or of painted metal, electrostatic charging shall be avoided.
- Use supply wires with a rating of at least 5 K above the ambient temperature.

WARNING: Substitution of components may impair suitability for Class I, Division 2

AVERTISSEMENT: la substitution de composants peut nuire à l'aptitude à la Classe I, Division 2

WARNING: Do not disconnect equipment unless power has been switched off or the area is known to be safe.

AVERTISSEMENT: Ne débranchez pas l'équipement sauf si l'alimentation a été coupée ou si la zone est connue pour être sûre.

Non Incendive field wiring installation

The non incendive field Wiring Circuit concept allows interconnection of Nonincendive Field wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Assosiated Intrinsically Safe Apparatus or Associated Apparatus not specially examined in combination as a syatem using any of the wiring methods permitted for unclassified locations, $V_{oc} < V_{max}$, $C_a \geq C_i + C_{cable}$, $L_a \geq L_i + L_{cable}$.

| Terminal 1,2 Non Incendive Field wiring parameters | Temperature Range |
|---|--|
| $V_{max} = 30 \text{ VDC}$, $C_i = 1\text{nF}$, $L_i = 0$ | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 75^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 60^{\circ}\text{C}$ |

Functional Ratings:

$U_{nom} \leq 30 \text{ VDC}$; $I_{nom} \leq 3.5 - 23 \text{ mA}$

FM Installation drawing 5437QF01-V5R0

FM Certificates FM16CA0146X and FM16US0287X

Division1 / Zone 0, Intrinsic Safe Installation

For safe installation of the 5431D.., 5434D.., 5435D.. and 5437D.. the following must be observed.

Marking: CL I, Div 1, Gp A,B,C,D
CL I, Zone 0 AEx ia IIC, T6...T4
CL I, Zone 1 [0] AEx ib [ia] IIC, T6...T4
Ex ia IIC, T6...T4 Ga
Ex ib [ia Ga] IIC, T6...T4 Gb

Hazardous Area

CL I, Div 1, GP ABCD
CL I, Zone 0 IIC

Non Classified Area

Terminal:

3,4,5,6,7,8,9


Uo: 7.2 VDC

Io: 12.9 mA

Po: 23.3 mW

Lo: 200 mH

Co: 13.5 µF

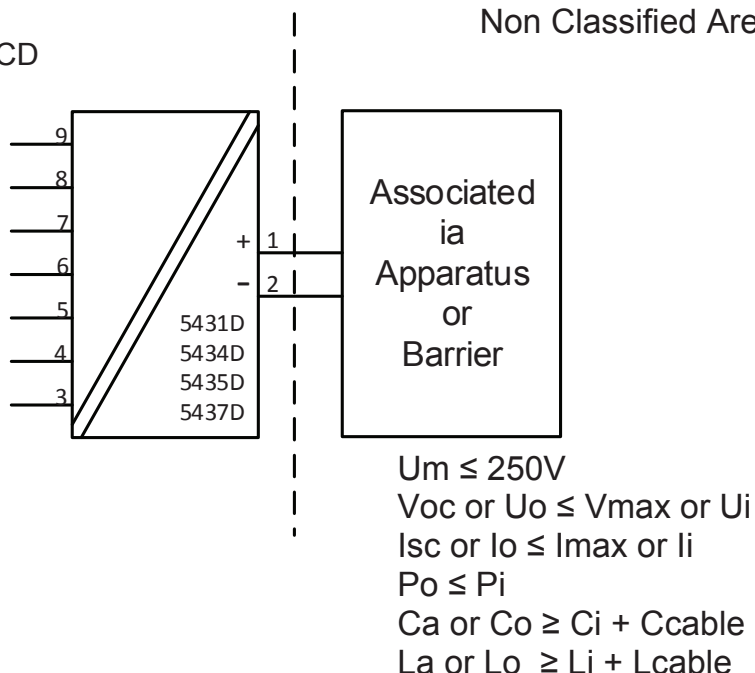


| Terminal 1,2 | Temperature Range |
|--|---|
| AEx/Ex ia IIC, T6...T4 Ga; CL I, Div 1, Gp ABCD, T6...T4; | |
| Ui: 30 VDC; li: 120 mA Pi: 900 mW Li:0 µH; Ci:1.0 nF | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 70°C T6: -50 ≤ Ta ≤ 55°C |
| Ui: 30 VDC; li: 100 mA Pi: 750 mW Li:0 µH; Ci:1.0 nF | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 75°C T6: -50 ≤ Ta ≤ 60°C |

Zone 0 / Zone 1, Intrinsic Safe Installation

Hazardous Area
CL I, Zone 0 IIC

Hazardous Area
CL I, Zone 1 IIC

Non Classified Area

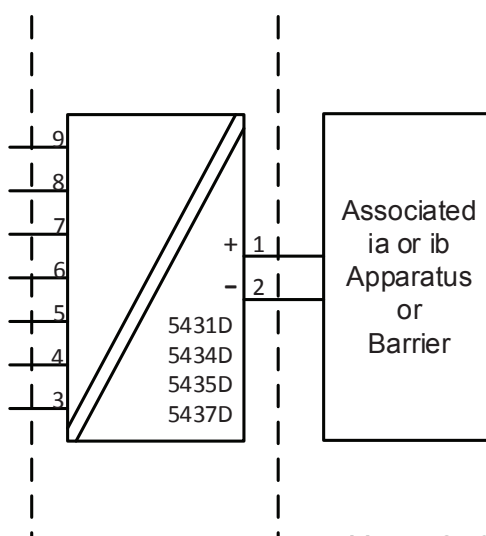

Terminal:

3,4,5,6,7,8,9

Uo: 7.2 VDC

Io: 12.9 mA

Po: 23.3 mW

Lo: 200 mH

Co: 13.5 µF

$U_m \leq 250V$

$V_{oc} \text{ or } U_o \leq V_{max} \text{ or } U_i$

$I_{sc} \text{ or } I_o \leq I_{max} \text{ or } I_i$

$P_o \leq P_i$

$C_a \text{ or } C_o \geq C_i + C_{cable}$

$L_a \text{ or } L_o \geq L_i + L_{cable}$

| Terminal 1,2 | Temperature Range |
|---|---|
| Ex ib [ia Ga] IIC T6...T4 Gb; | |
| Ui: 30 VDC; li: 120 mA Pi: 900 mW Li:0 µH; Ci:1.0nF | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 70°C T6: -50 ≤ Ta ≤ 55°C |
| Ui: 30 VDC; li: 100 mA Pi: 750 mW Li:0 µH; Ci:1.0 nF | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 75°C T6: -50 ≤ Ta ≤ 60°C |

IS installation instructions

- Install in accordance with the US the National Electrical Code (NEC) or for Canada the Canadian Electrical Code (CEC).
- Equipment that is FM-approved for intrinsic safety may be connected to barriers based on the ENTITY CONCEPT. This concept permits interconnection of approved transmitters, meters and other devices in combinations which have not been specifically examined by FM, provided that the agency's criteria are met. The combination is then intrinsically safe, if the entity concept is acceptable to the authority having jurisdiction over the installation.
- The entity concept criteria are as follows:
The intrinsically safe devices, other than barriers, must not be a source of power. The maximum voltage U_i (V_{max}) and current I_i (I_{max}), and maximum power P_i (P_{max}), which the device can receive and remain intrinsically safe, must be equal to or greater than the voltage (U_o or V_o or V_t) and current (I_o or I_{sc} or I_t) and the power P_o which can be delivered by the barrier.
- The sum of the maximum unprotected capacitance (C_i) for each intrinsically device and the interconnecting wiring must be less than the capacitance (C_a) which can be safely connected to the barrier.
- The sum of the maximum unprotected inductance (L_i) for each intrinsically device and the interconnecting wiring must be less than the inductance (L_a) which can be safely connected to the barrier.
- The entity parameters U_o , V_o or V_t and I_o , I_{sc} or I_t , and C_a and L_a for barriers are provided by the barrier manufacturer.
- The transmitter must be installed in a suitable enclosure to meet installation codes stipulated in the Canadian Electrical Code (CEC) or for US the National Electrical Code (NEC).
- If the enclosure is made of non-metallic materials or of painted metal, electrostatic charging shall be avoided.
- Use supply wires with a rating of at least 5 K above the ambient temperature.


WARNING: Substitution of components may impair intrinsic safety

AVERTISSEMENT: la substitution de composants peut nuire à la sécurité intrinsèque

Division 2 / Zone 2, Non Sparking Installation

For safe installation of the 5431A.., 5434A.., 5435A.. and 5437A.. the following must be observed.

| | |
|---------|---|
| Marking | Class I, Division 2, GP A,B,C,D T6...T4 |
| | Class I, Zone 2 AEx nA IIC, T6...T4 Gc |
| | Class I, Zone 2 Ex nA IIC, T6...T4 Gc |
| | NIFW, CL I, Div 2, GP A,B,C,D |

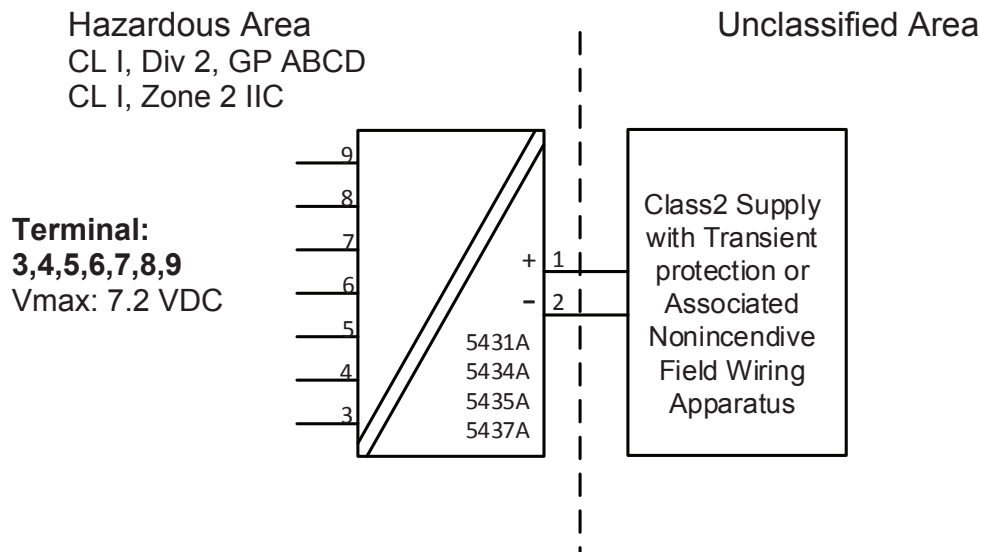

| Terminal 1,2 AEx/Ex nA IIC T6..T4 Gc | Temperature Range |
|---|--|
| Supply voltage: max 37 VDC | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 70^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 55^{\circ}\text{C}$ |
| Supply voltage: max 30 VDC | T4: $-50 \leq T_a \leq 85^{\circ}\text{C}$ T5: $-50 \leq T_a \leq 75^{\circ}\text{C}$ T6: $-50 \leq T_a \leq 60^{\circ}\text{C}$ |

NI Installation instructions

- The transmitter must be installed in an enclosure providing a degree of protection of at least IP54 according to IEC60529 that is suitable for the application and is correctly installed. Cable entry devices and blanking elements shall fulfill the same requirements.
- If the enclosure is made of non-metallic materials or of painted metal, electrostatic charging shall be avoided.
- Use supply wires with a rating of at least 5 K above the ambient temperature.

WARNING: Substitution of components may impair suitability for Class I, Division 2
 AVERTISSEMENT: la substitution de composants peut nuire à la sécurité intrinsèque

WARNING: Do not disconnect equipment unless power has been switched off or the area is known to be safe.

AVERTISSEMENT: Ne débranchez pas l'équipement sauf si l'alimentation a été coupée ou si la zone est connue pour être sûre.

Non Incendive Field Wiring installation

The non incendive field Wiring Circuit concept allows interconnection of Nonincendive Field wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Associated Intrinsically Safe Apparatus or Associated Apparatus not specially examined in combination as a system using any of the wiring methods permitted for unclassified locations, $V_{oc} < V_{max}$, $C_a \geq C_i + C_{cable}$, $L_a \geq L_i + L_{cable}$.

| Terminal 1,2 | |
|---|--|
| Non Incendive Field Wiring parameters | Temperature Range |
| $V_{max} = 30 \text{ VDC}$, $C_i = 1\text{nF}$, $L_i = 0$ | T4: $-50 \leq T_a \leq 85^\circ\text{C}$ T5: $-50 \leq T_a \leq 75^\circ\text{C}$ T6: $-50 \leq T_a \leq 60^\circ\text{C}$ |

Functional Ratings:

$U_{nom} \leq 30 \text{ VDC}$; $I_{nom} \leq 3.5 - 23 \text{ mA}$

Instalação INMETRO 5437QB01-V3R0

INMETRO Certificado DEKRA 16.0008X

Normas: ABNT NBR IEC60079-0:2013, ABNT NBR IEC60079-11:2013
ABNT NBR IEC60079-15:2012

Para a instalação segura do 5431D.., 5434D.., 5435D.. e 5437D.. os seguintes pontos devem ser observados:


NOTAS

- Ex ia IIC T6...T4 Ga ou
- Ex ib [ia Ga] IIC T6...T4 Gb
- Ex ia IIIC Da
- Ex ia I Ma

Instalação Ex ia

Área Classificada
Zone 0, 1, 2, 20, 21, 22 e M1

Área Não classificada

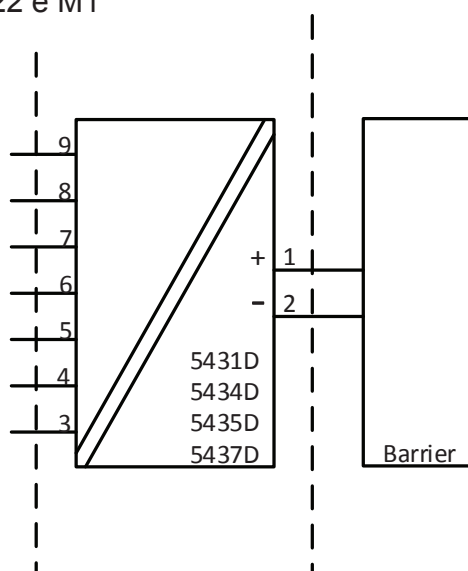


| | Terminais 3,4,5,6 e 3,7,8,9 | Terminais 3,4,5,6,7,8,9 |
|-----|---------------------------------------|-----------------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 µF | 13.5 µF |

Instalação Ex ib

Área Classificada
Zonas 0, 1, 2,
20, 21, 22 e Ma

Área Classificada
Zona 1

Área Não Classificada

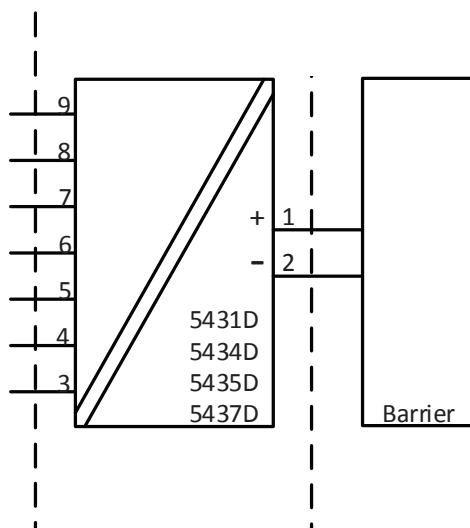

| | Terminais 3,4,5,6 e 3,7,8,9 | Terminais 3,4,5,6,7,8,9 |
|-----|---------------------------------------|-----------------------------------|
| Uo | 7.2 VDC | 7.2 VDC |
| Io: | 7.3 mA | 12.9 mA |
| Po | 13.2 mW | 23.3 mW |
| Lo: | 667 mH | 200 mH |
| Co | 13.5 µF | 13.5 µF |

| Terminais 1,2 Instalações Ex ia e Ex ib Ui: 30 VDC; li: 120 mA; Li: 0 µH; Ci: 1.0nF | Faixas de Temperaturas |
|---|---|
| Pi: 900 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 65^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 50^{\circ}\text{C}$ |
| Pi: 750 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 70^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 55^{\circ}\text{C}$ |
| Pi: 610 mW | T4: $-50 \leq Ta \leq 85^{\circ}\text{C}$ T5: $-50 \leq Ta \leq 75^{\circ}\text{C}$ T6: $-50 \leq Ta \leq 60^{\circ}\text{C}$ |

Instruções Gerais de Instalação

Se o invólucro for feito de materiais não metálicos ou de metal com uma camada de tinta mais espessa que 0,2 mm (grupo IIC) ou 2 mm (grupo IIB, IIA, I) ou qualquer espessura (grupo III), cargas eletrostáticas devem ser evitadas.

Para EPL Ga, se o invólucro for de alumínio, ele deve ser instalado de forma que as fontes de ignição devido a faíscas de impacto e fricção sejam excluídas.

A distância entre terminais, fios inclusivos não isolados, deve ser separada por pelo menos 3 mm de qualquer metal aterrado.

Os pinos de testes para medição devem permitir os testes de *loop* de corrente mantendo a integridade do *loop*. A energia deve estar conectada ao transmissor quando for usado os pinos de teste. Para instalações em áreas classificadas deve ser utilizado somente equipamentos certificados.

Se o transmissor foi aplicado no tipo de proteção Ex nA e Ex ec, não pode ser aplicado para segurança intrínseca.

Para instalações com uma atmosfera de gás potencialmente explosiva, a seguinte instrução se aplicará:

O transmissor deverá ser montado em um gabinete de formato tipo B de acordo com a norma DIN43729 ou equivalente que possibilita um grau mínimo de proteção IP20 de acordo com a ABNT NBR IEC60529.

O gabinete deve ser adequado para a aplicação e instalado corretamente.

Para instalação em uma atmosfera de poeira potencialmente explosiva, as seguintes instruções se aplicarão:

O transmissor deverá ser montado em um gabinete de metal de formato B de acordo com a DIN43729 ou equivalente que possibilita um grau mínimo de proteção IP5X de acordo com a ABNT NBR IEC60529. O gabinete deve ser adequado para a aplicação e instalado corretamente.

Os dispositivos de entrada de cabos e os elementos espaçadores devem satisfazer os mesmos requisitos.

Para EPL Da, a temperatura máxima da superfície externa do gabinete é 20 K mais quente do que a máxima temperatura ambiente para uma camada de pó, com uma espessura de até 5 mm.

Para instalações em Minas, as instruções abaixo se aplicam:

O transmissor deverá ser montado em um gabinete de metal que possibilita um grau mínimo de proteção IP54 de acordo com a ABNT NBR IEC60529

Gabinetes de Alumínio não são permitidos para instalações em Minas.

O gabinete deve ser adequado para a aplicação e instalado corretamente.

Os dispositivos de entrada de cabos e os elementos espaçadores devem satisfazer os mesmos requisitos


Instalações Ex nA / Ex ic

Para instalações seguras do 5431A.., 5434A.., 5435A.. e 5437A.. as seguintes instruções devem ser observadas

Notas

Ex nA IIC T6...T4 Gc
 Ex ec IIC T6...T4 Gc
 Ex ic IIC T6...T4 Gc
 Ex ic IIIC Dc

Área Classificada
 Zona 2 e 22

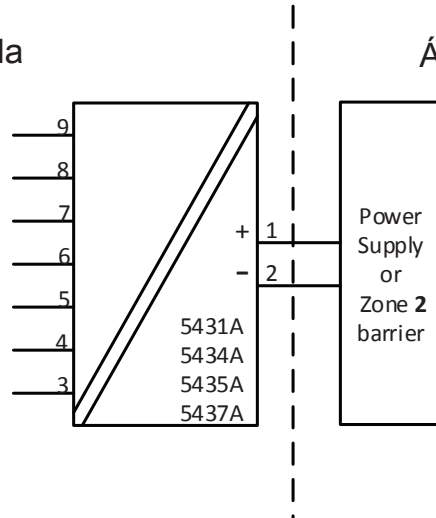

Área Não Classificada

| Terminais 1,2 Ex nA & ec | Terminais 1,2 Ex ic | Terminais 1,2 Ex ic | Faixa de Temperatura |
|-----------------------------|---|--|---|
| Vmax= 37 VDC | Ui = 37 VDC Li = 0 µH Ci = 1.0 nF | Ui = 48 VDC Pi = 851 mW Li = 0 µH Ci = 1.0 nF | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 70°C T6: -50 ≤ Ta ≤ 55°C |
| Vmax= 30 VDC | Ui = 30 VDC Li = 0 µH Ci = 1.0 nF | | T4: -50 ≤ Ta ≤ 85°C T5: -50 ≤ Ta ≤ 75°C T6: -50 ≤ Ta ≤ 60°C |

| Terminais 3,4,5,6,7,8,9 Ex nA & Ex ec | Terminais 3, 4, 5, 6 and 3, 7, 8, 9 Ex ic | Terminais 3,4,5,6,7,8,9 Ex ic |
|---|--|---|
| Vmax = 7.2VDC | Uo: 7.2 VDC Io: 7.3 mA Po: 13.2 mW Lo: 667 mH Co: 13.5µF | Uo: 7.2 VDC Io: 12.9 mA Po: 23.3 mW Lo: 200 mH Co: 13.5µF |

Instruções gerais de instalação:

Se o invólucro for feito de materiais não metálicos, ou se for feito de metal com uma camada de tinta mais espessa que 0,2 mm (grupo IIC), ou 2 mm (grupo IIB, IIA, I) ou qualquer espessura (grupo III), cargas eletrostáticas devem ser evitadas.

Para uma temperatura ambiente $\geq 60^{\circ}\text{C}$, cabos resistentes a aquecimento deverão ser usados com classificação de no mínimo 20 K acima da temperatura ambiente.

O gabinete deve ser adequado para a aplicação e instalado corretamente.

A distância entre terminais, fios inclusivos não isolados, deve ser separada por pelo menos 3 mm de qualquer metal aterrado.

A conexão TESTE, deve ser utilizado somente quando a área é segura, ou quando a fonte / circuito de saída e o medidor de corrente aplicado seja do tipo intrinsecamente seguro.

Para instalações em uma atmosfera de gás potencialmente explosiva, as instruções abaixo e aplicação:

O transmissor deverá ser instalado em um gabinete que possibilita um grau de proteção de no mínimo IP54 de acordo com a ABNT NBR IEC 60079-0.

Em adição, o gabinete deverá possibilitar um grau de poluição interna de 2 ou melhor, como definido na ABNT NBR IEC60664-1.

Os dispositivos de entrada de cabos e os elementos espaçadores devem satisfazer os mesmos requisitos

Para a instalação em uma atmosfera de poeira potencialmente explosiva, as seguintes instruções se aplicarão:

Para EPL Dc, a temperatura da superfície do invólucro é igual à temperatura ambiente mais 20 K, para uma camada de pó, com uma espessura de até 5 mm.

Se o transmissor de temperatura é alimentado com o sinal de segurança intrínseca "ic" e faz com um sinal de segurança intrínseco "ic" (exemplo de um dispositivo passivo), o transmissor deverá ser montado em um gabinete de metal de forma B de acordo com a DIN 43729 ou equivalente que possibilite um grau de proteção de no mínimo IP54 de acordo com a ABNT NBR IEC60079-0.

Os dispositivos de entrada de cabos e os elementos de supressão devem cumprir os mesmos requisitos.

Se o transmissor é alimentado com um sinal anti-faísca "nA", ou faz interface com um sinal anti-faísca, o transmissor deverá ser montado em um gabinete que, possibilite uma proteção mínima do tipo IP54 de acordo com a ABNT NBR IEC60079-0, e em conformidade com o tipo de proteção Ex tD, ou Ex t.

Os dispositivos de entrada de cabos e os elementos espaçadores devem satisfazer os mesmos requisitos

NEPSI Installation drawing 5437QN01-V1R0

NEPSI 证书 GYJ18.1054X

防爆标志为 Ex ia IIC T4~ T6 Ga
Ex ib [ia Ga] IIC T4~ T6 Gb
Ex ic IIC T4/T5/T6 Gc
Ex nA [ic Gc] IIC T4~T6 Gc
Ex iaD 20 T80°C/T95°C/T130°C
Ex ibD [iaD 20] 21 T80°C/T95°C/T130°C

二、产品使用注意事项

1. 变送器的使用环境温度范围、温度组别与安全参数的关系如下表所示：

| 接线端子 | 防爆等级 | 环境温度 | 温度组别 | 安全参数 |
|---------------------------|--------------------|-------------|-----------|---|
| 1, 2 | ia, ib iaD, ibD | (-50~+50)°C | T6/T80°C | U _i =30 V I _i =120 mV P _i =900 mW L _i ≈0 C _i =1 nF |
| | | (-50~+65)°C | T5/T95°C | |
| | | (-50~+85)°C | T4/T130°C | |
| | | (-50~+55)°C | T6/T80°C | U _i =30 V I _i =120 mV P _i =750 mW L _i ≈0 C _i =1 nF |
| | | (-50~+70)°C | T5/T95°C | |
| | | (-50~+85)°C | T4/T130°C | |
| | | (-50~+60)°C | T6/T80°C | U _i =30 V I _i =120 mV P _i =610 mW L _i ≈0 C _i =1 nF |
| | | (-50~+75)°C | T5/T95°C | |
| | | (-50~+85)°C | T4/T130°C | |
| | ic | (-50~+55)°C | T6 | U _i =37 V L _i ≈0 C _i =1 nF 或 U _i =48 V P _i =851 mW L _i ≈0 C _i =1 nF |
| | | (-50~+70)°C | T5 | |
| | | (-50~+85)°C | T4 | |
| | | (-50~+60)°C | T6 | U _i =30 V L _i ≈0 C _i =1 nF |
| | | (-50~+75)°C | T5 | |
| | | (-50~+85)°C | T4 | |
| 1, 2 | nA | (-50~+55)°C | T6 | U _{max} =37 V |
| | | (-50~+70)°C | T5 | |
| | | (-50~+85)°C | T4 | |
| | | (-50~+60)°C | T6 | U _{max} =30 V |
| | | (-50~+75)°C | T5 | |
| | | (-50~+85)°C | T4 | |
| 3, 4, 5, 6, 7, 8, 9 | ia, ib, ic | (-50~+85)°C | | U _o =7.2 V I _o =12.9 mA P _o =23.3 mW L _o =200 mH C _o =13.5 μF |

2. 变送器必须与已经通过防爆认证的关联设备配套/传感器共同组成本安防爆系统方可用于爆炸性危险场所。其系统接线必须同时遵守本产品、所配关联设备和传感器的使用说明书要求，接线端子不得接错。

3. 用户不得自行更换该产品的零部件，应会同产品制造商共同解决运行中出现的故障，以杜绝损坏现象的发生。

4. 用户在安装、使用和维护变送器时，须同时严格遵守产品使用说明书和下列标准：

GB 3836.13-2013 爆炸性环境 第 13 部分：设备的修理、检修、修复和改造

GB 3836.15-2000 爆炸性气体环境用电气设备 第 15 部分：危险场所电气安装（煤矿除外）

GB 3836.16-2006 爆炸性气体环境用电气设备 第 16 部分：电气装置的检查和维护（煤矿除外）

GB 3836.18-2010 爆炸性环境第 18 部分：本质安全系统

GB 3836.20-2010 爆炸性环境第 20 部分：设备保护级别（EPL）为 Ga 级的设备

GB 50257-2014 电气装置安装工程爆炸和火灾危险环境电气装置施工及验收规范

GB 12476.2-2010 可燃性粉尘环境用电气设备 第 2 部分：选型和安装

GB 15577-2007 粉尘防爆安全规程

Appendix A: Diagnostics overview

| Incident Description | Description | LED reaction | Analog Output Reaction | NE-107 Class | User action | Error # |
|--|--|--------------|-------------------------|--|----------------------------|---------|
| The device variable mapped to PV (and analog out put current) is beyond its operating limits. | Primary Value Out Of Limits | Flashing Red | Enters configured Value | Maintenance required | Reconnect or repair sensor | 0 |
| Any other device variable is beyond its operating limits. | Non-Primary Value Out Of Limits | Flashing Red | No impact | Maintenance required | Reconnect or repair sensor | 1 |
| The loop current has reached the Current Output Upper Limit (UL) or Output Lower Limit (LL) as configured with command #147, and is no longer corresponding to the PV value. | Loop Current Saturated | Flashing Red | Enters configured Value | If output range check is enabled: Failure otherwise Maintenance required | Reconnect or repair sensor | 2 |
| The analogue output current is being simulated or disabled. | Loop Current Fixed | Flashing Red | Enters configured Value | Function check | N.A. | 3 |
| The configuration has changed since this bit was last cleared (seen from same master type, Primary- or Secondary Master). | Configuration Changed | No Impact | No impact | N.A. | N.A. | 6 |
| A sensor error (broken/shorted sensor) is detected on Input 1 | Primary Input 1 error | Flashing Red | Enters configured Value | If no backup input is available and mapped to PV, then failure otherwise maintenance required. | Reconnect or repair sensor | 10 |
| A sensor error (broken/shorted sensor) is detected on Input 2. This is only possible if Input type 2 is <> "None" | Primary Input 2 error (only if Input 2 is enabled) | Flashing Red | Enters configured Value | If no backup input is available and mapped to PV, then failure otherwise maintenance required. | Reconnect or repair sensor | 11 |
| A sensor error (broken/shorted sensor) is detected on the CJC measurement used for Input 1 | CJC for Input 1 error (only if used) | Flashing Red | Enters configured Value | If no backup input is available and mapped to PV, then failure otherwise maintenance required. | Reconnect or repair sensor | 12 |
| A sensor error (broken/shorted sensor) is detected on the CJC measurement used for Input 2 | CJC for Input 2 error (only if used) | Flashing Red | Enters configured Value | If no backup input is available and mapped to PV, then failure otherwise maintenance required. | Reconnect or repair sensor | 13 |
| The difference between measurements on Input 1 and Input 2 is outside the configured sensor drift limit | Dual Input: Sensor drift alarm (only if enabled) | Flashing Red | Enters configured Value | if sensor drift = error => failure otherwise maintenance required. | Reconnect or repair sensor | 14 |
| A sensor error (broken/shorted) is detected on the primary sensor, backup sensor is in use | Dual Input: Backup sensor OK, main sensor error | No Impact | No impact | Maintenance required | Reconnect or repair sensor | 15 |
| A sensor error (broken/shorted) is detected on the backup sensor, primary sensor only is available | Dual Input: Backup sensor error, main sensor OK | No Impact | No impact | Maintenance required | Reconnect or repair sensor | 16 |
| Configuration is temporarily invalid < 3 seconds, e.g. while downloading parameters | Configuration not supported by device | Flashing Red | Value is held (freeze) | Failure | N.A. | 17 |

| Incident Description | Description | LED reaction | Analog Output Reaction | NE-107 Class | User action | Error # |
|--|--|--------------|------------------------|----------------------|--|---------|
| Configuration is temporary invalid > 3 seconds, e.g. if download is paused | Configuration not supported by device | Lights Red | Safe State | Failure | Correct and/or re-send the configuration | 18 |
| The device is operated outside its specified temperature range | Internal electronics temperature alarm | Flashing Red | No impact | Out of specification | Check operating temperature | 19 |
| The device is operated outside its specified temperature range in SIL mode | Internal electronics temperature alarm | Lights Red | Safe State | Failure | Check operating temperature | 20 |
| Power is applied but still too low | Minimum supply voltage not reached | Off | Safe State | Function check | Check power supply (at output terminals). If the error is persistent send in the device for repair | 21 |
| The device is transitioning to SIL mode, or have failed to do so | Attempting or failed to enter SIL mode | Lights Red | Safe State | Function check | The SIL configuration must be validated or normal operation must be re-selected | 22 |
| An unrecoverable error occurred in the internal communication to the Input CPU | Error in communication with Input CPU | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 23 |
| An unrecoverable error occurred in the Input CPU | Input CPU reconfiguration failed | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 24 |
| The device is operated below its specified voltage supply range | Supply voltage too low | Lights Red | Safe State | Failure | Check power supply (at output terminals). Reset or re-power the device. If the error is persistent send in the device for repair | 25 |
| The read back loop current differs from the calculated output current | Loop current read back error | Lights Red | Safe State | Failure | Check power supply (at output terminals). Reset or re-power the device. If the error is persistent send in the device for repair | 26 |
| The device is operated above its specified voltage supply range | Supply voltage too high | Lights Red | Safe State | Failure | Check power supply (at output terminals). Reset or re-power the device. If the error is persistent send in the device for repair | 27 |
| The configuration in the NVM has become inconsistent | Error in data verification after writing to EEPROM | Lights Red | Safe State | Failure | Correct and/or re-send the configuration. If the error is persistent send the device to repair | 28 |
| The configuration in the NVM has become inconsistent | CRC16 error in cyclic test of EEPROM | Lights Red | Safe State | Failure | Correct and/or re-send the configuration. If the error is persistent send the device to repair | 29 |
| An unrecoverable error occurred in the internal communication to the EEPROM | Error in EEPROM communication | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 30 |
| An unrecoverable memory error occurred in the internal main CPU | CRC16 error in cyclic test of program code in FLASH | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 31 |
| An exception error occurred in the main CPU program execution | Exception error during code execution | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 32 |
| The main program was reset unintentionally due to a stuck up | Watchdog Reset Executed | Lights Red | Safe State | Failure | Correct and/or re-send the configuration. If the error is persistent send the device to repair | 33 |
| Sensor error is detected on the internal temperature sensor | Internal RTD sensor error | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 34 |
| An unrecoverable memory error occurred in the internal main CPU | CRC16 error in cyclic test of safe-domain RAM contents | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 35 |

| Incident Description | Description | LED reaction | Analog Output Reaction | NE-107 Class | User action | Error # |
|--|--|--------------|------------------------|--------------|---|---------|
| An exception error occurred in the main CPU program execution | Stack integrity error | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 36 |
| An unrecoverable memory error occurred in the internal main CPU | CRC16 error in factory data in FLASH | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 37 |
| An unrecoverable memory error occurred in the internal main CPU | RAM cell error | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 38 |
| An unrecoverable memory error occurred in the internal main CPU | Safe domain RAM integrity error | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 39 |
| An unrecoverable memory error occurred in the internal input CPU | CRC16 error in input CPU configuration | Lights Red | Safe State | Failure | Reset or re-power the device. If the error is persistent send in the device for repair | 40 |
| A critical measurement error is detected on internal voltage reference | Drift error, reference voltage FVR | Flashing Red | Safe State | Failure | Reconnect or repair sensor. If the error is persistent send in the device for repair | 41 |
| A critical measurement error is detected on internal voltage reference | Drift error, reference voltage VREF | Flashing Red | Safe State | Failure | Reconnect or repair sensor. If the error is persistent send in the device for repair | 42 |
| A critical measurement error is detected on Input 1 | Drift error, primary Input 1 | Flashing Red | Safe State | Failure | Reconnect or repair sensor. If the error is persistent send in the device for repair | 43 |
| A critical measurement error is detected on Input 2 | Drift error, primary Input 2 | Flashing Red | Safe State | Failure | Reconnect or repair sensor. If the error is persistent send in the device for repair | 44 |
| A critical measurement error is detected on the ground measurement | Drift error, ground voltage offset to terminal 3 | Flashing Red | Safe State | Failure | Reconnect or repair sensor. If the error is persistent send in the device for repair | 45 |
| The device is in simulation mode and one or more of its Device Variables are not representative of the process | Device Variable Simulation Active | No Impact | No impact | N.A. | N.A. | 46 |

Document history

The following list provides notes concerning revisions of this document.

| Rev. ID | Date | Notes |
|---------|------|--|
| 101 | 1817 | Initial release of the product. |
| 102 | 1908 | Marine approval received. Appendix A updated. |
| 103 | 1924 | 5437B version added. ATEX installation drawing updated. |
| 104 | 2004 | Updated certificates and installation drawings - ATEX, IECEx, CSA and INMETRO. |
| 105 | 2018 | Accuracy table updated for TC and mV inputs. Accuracy calculations updated for TC examples. |

We are near you, *all over the world*

Our trusted red boxes are supported wherever you are

All our devices are backed by expert service and a 5-year warranty. With each product you purchase, you receive personal technical support and guidance, day-to-day delivery, repair without charge within the warranty period and easily accessible documentation.

We are headquartered in Denmark, and have offices and authorized partners the world over. We are a local

business with a global reach. This means that we are always nearby and know your local markets well. We are committed to your satisfaction and provide PERFORMANCE MADE SMARTER all around the world.

For more information on our warranty program, or to meet with a sales representative in your region, visit prelectronics.com.

Benefit today from ***PERFORMANCE MADE SMARTER***

PR electronics is the leading technology company specialized in making industrial process control safer, more reliable and more efficient. Since 1974, we have been dedicated to perfecting our core competence of innovating high precision technology with low power consumption. This dedication continues to set new standards for products communicating, monitoring and connecting our customers' process measurement points to their process control systems.

Our innovative, patented technologies are derived from our extensive R&D facilities and from having a great understanding of our customers' needs and processes. We are guided by principles of simplicity, focus, courage and excellence, enabling some of the world's greatest companies to achieve PERFORMANCE MADE SMARTER.